



PRODUCT INFORMATION

1	Front Panel	x1
2	Back Panel	x1
3	Left Panel	x1
4	Right Panel	x1
5	Square Tube	x2
6	Crossbar	x6
7	Lower Bracket	x4
8	Upper Bracket	x4
9	M8*20 Round Head Hexagon Screw	x8
10	M8*35 Round Head Hexagon Screw	x12
11	M8*25 Round Head Hexagon Screw	x12
12	M8*14 Round Head Hexagon Screw	x12
13	M8 Anti-loose Nut	x28
14	M8 Washer	x20
15	M8 Cushion	x8
16	Hex Wrench	x1
17	Open-end Wrench	x1
18	60*30mm Shockproof foam	x4
19	34*25mm Shockproof foam	x4

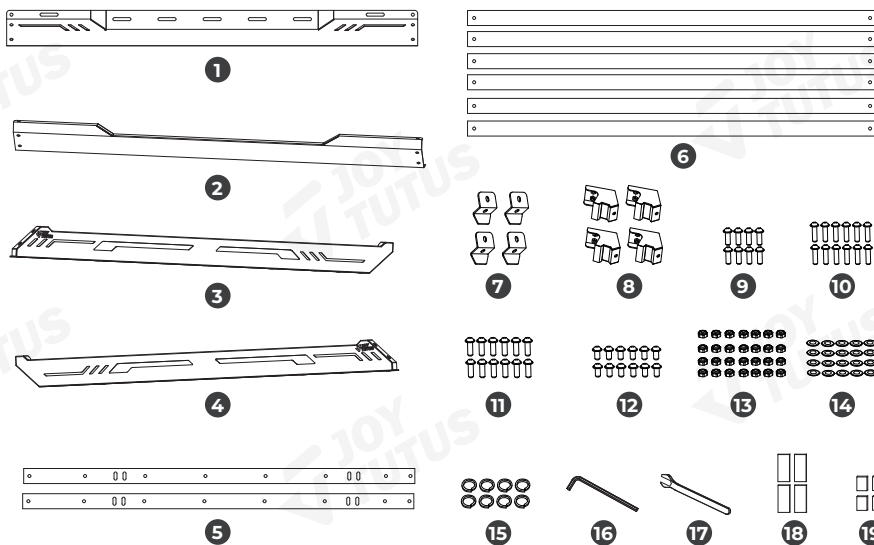


INSTALLATION METHOD


Step 1 Lock the top 12 holes of [1] [2] [3], and [4] using [12] (12pcs) and [13] (12pcs), with the assistance of tools [16] and [17], without tightening.

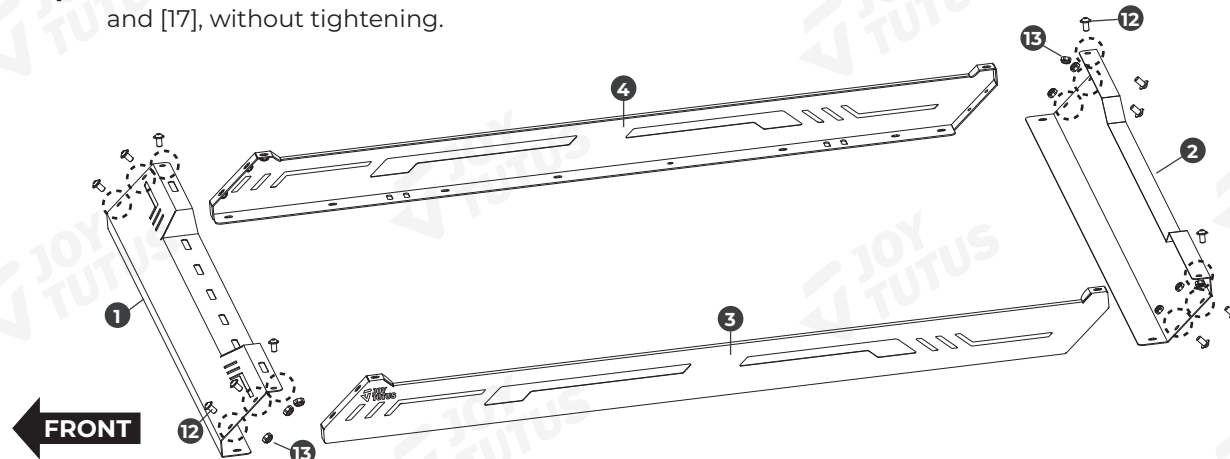

Step 2 Combine the assembly from step 1 with [5] (2pcs, pay attention to the direction of [5]) using [11] (4pcs) and [13] (4pcs), and lock them together with the help of tools [16] and [17], without tightening.

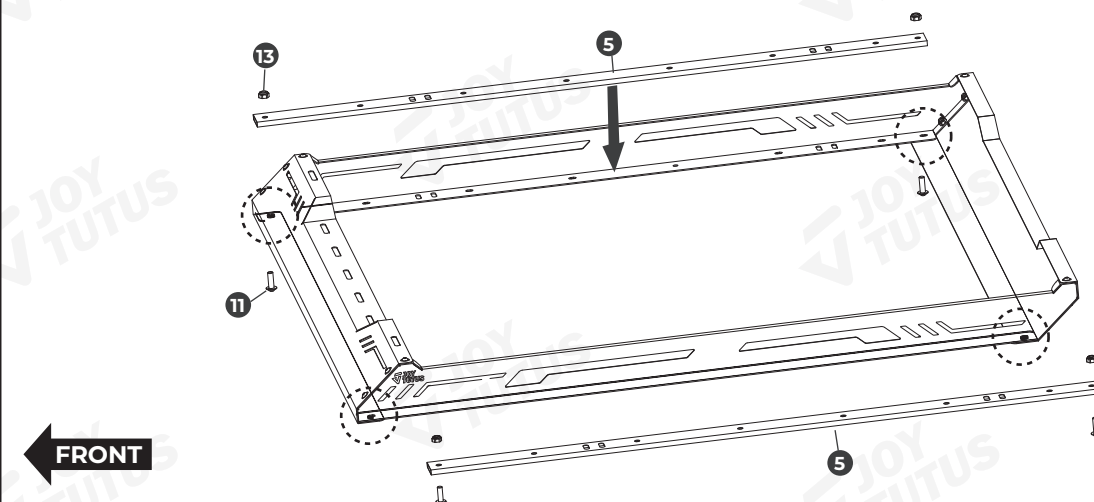


Step 3 Lock the assembly from step 2 with [6] (6pcs) using [10] (12PCS), [14] (12PCS), and [13] (12PCS), with the assistance of tools [16] and [17], and then tighten all screws of step 1 and step 2.

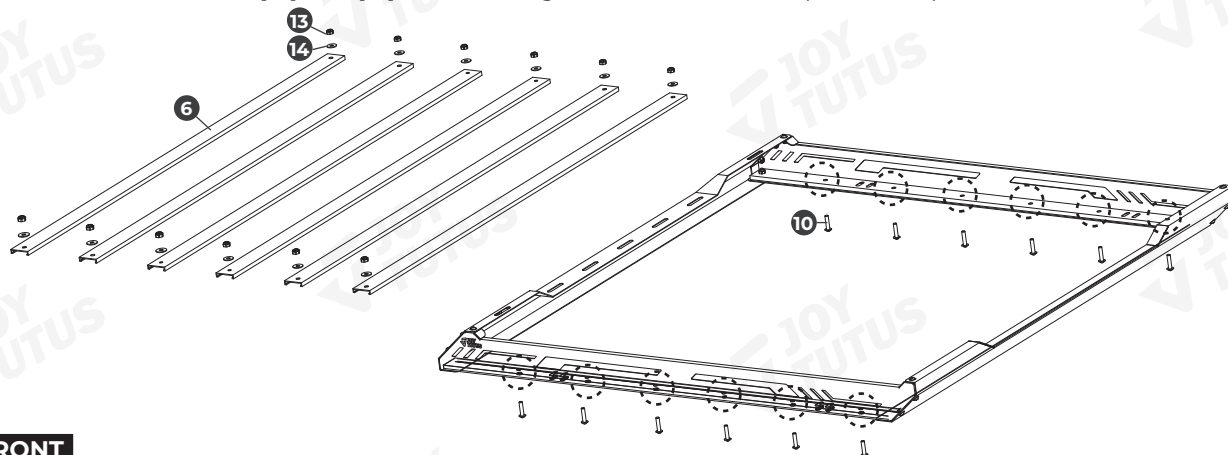


Step 4 Paste [18] (4PCS) at the bottom of [8] (4PCS).


Step 5 Combine the assembly from step 3 with [8] (4PCS) using [11] (8PCS), and lock them together with the help of tool [16], without tightening.

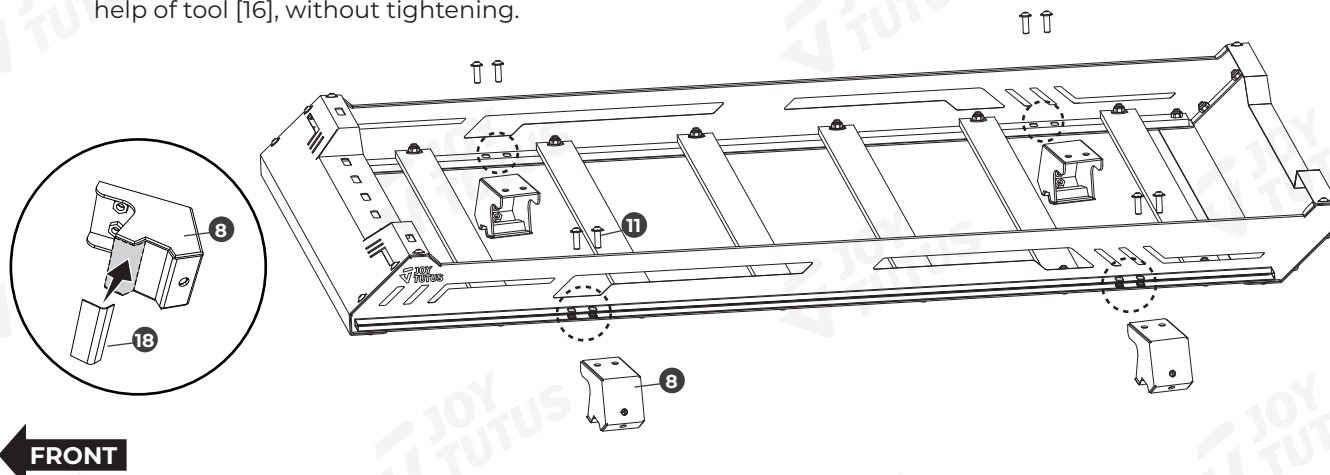


Step 6 Lift the assembly from step 5 onto the roof of the car, adjust the position of the brackets, insert the brackets into the rain groove on the roof, and then use tool [16] to tighten the screws on step 5 (8pcs).

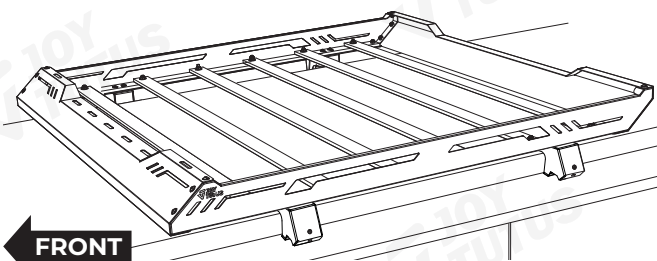

Step 8 First, tighten the bottom screw [9] (8pcs) through [15] (8pcs), [14] (8pcs), [7] (4pcs), and [8] in order. Install the other three brackets in the same way. Installation is complete.

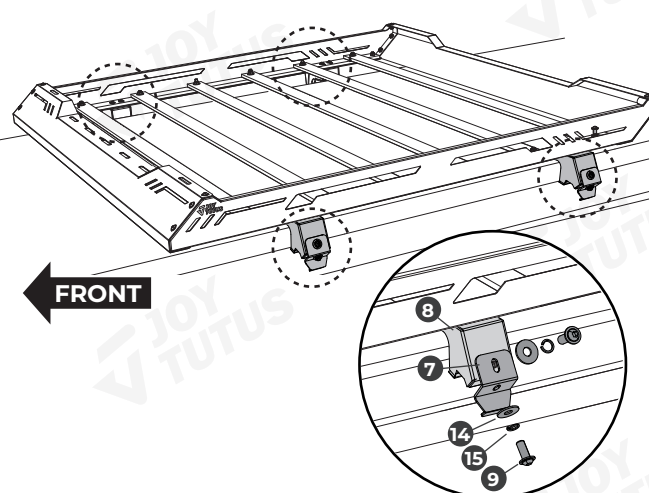

Step 7 Paste [19] (4PCS) at the bottom of [7] (4PCS).



If you have any questions, please visit Joytutus website or email for quick response.

Web: www.joytutus.com

Email: Service@joytutus.com