

NOTES

- 1) Make sure the vehicle is completely clean and dry in the area the part is to be installed.
- 2) Ensure the vehicle is properly protected in the area that the accessory is to be installed.
- 3) Any weight carried on the vehicle on vehicle will adversely affect its handling particularly in cornering or in a crosswind and the vehicle should therefore be driven with increased caution.
- 4) Loads must be evenly distributed and secured.


If you have any concern of installing or using this product Please feel free to contact us via service@joytutus.com

KIT CONTENTS

Front Crossbar x1




Rear Crossbar x1



Key x2



Allen key x1



Installation Instruction x1

INSTALLATION METHOD

- NOTE:**
1. The round head of the crossbar faces to the front, and the pointy head faces to the rear. (see Figure 1)
 2. You can adjust the length of crossbar if you need. (see Figure 2)



Figure 1


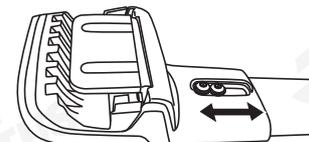


Figure 2


Step 1: Front Crossbar

Use the key to unlock the lock and remove the cover

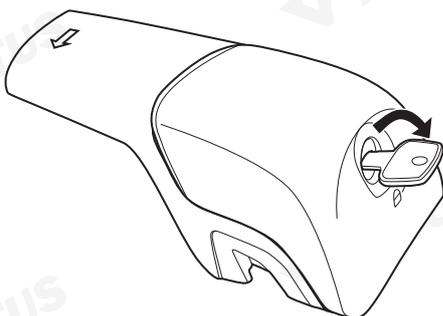


Step 2: Front Crossbar

Loosen the screw (Don't throw away)

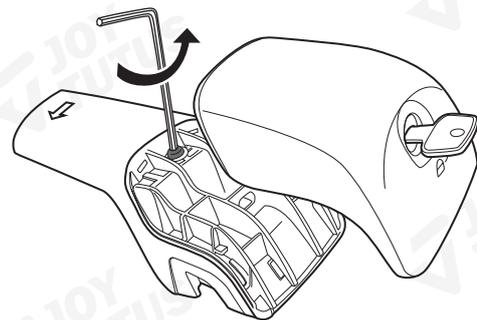


Step 3: Front Crossbar

Loosen the bottom clamp
Left and Right sides are adjustable


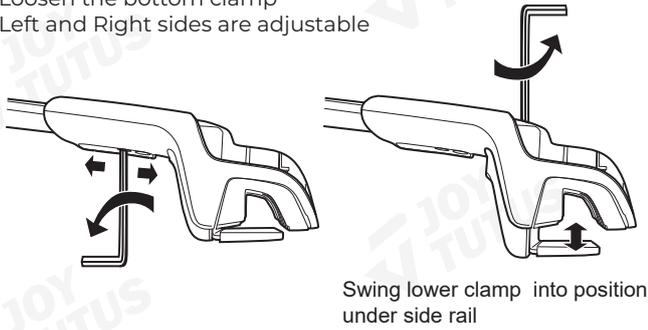


Step 4: Front Crossbar

Put the cover back and lock it



Torque: 30-35 in./lbs

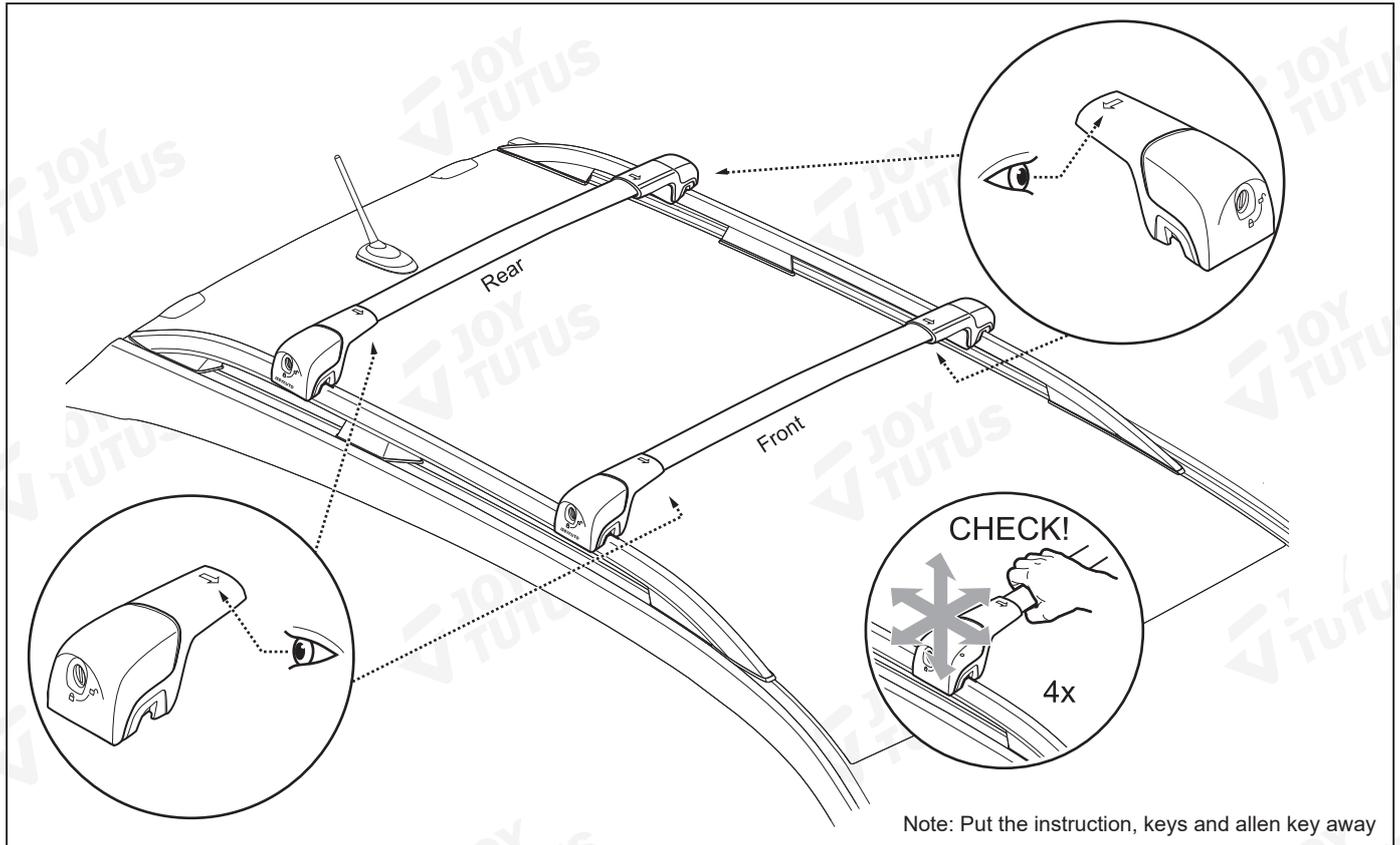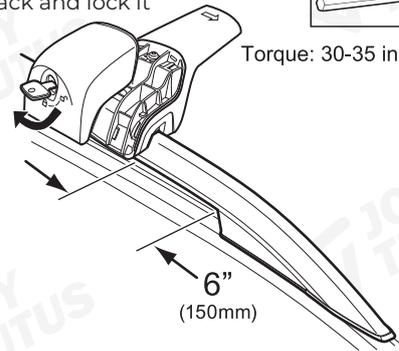

Torque 4 - 6N.M is required for tightening front and rear mounting leg, Do not over tighten screw!