



KIT CONTENTS:


Bar x2



Base x4


M5x10mm Bolt x8
(Installed in the bars)


Key x2



M6x15mm Bolt x8




Allen Key


Installation
Instruction

INSTRUCTION

Note:



The round side of the bar faces to the front, and the pointy side faces to the rear



Step 1:

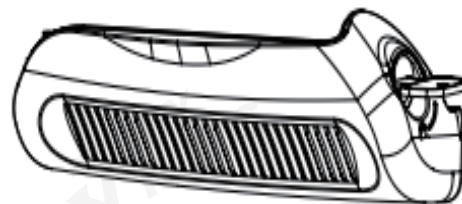
Use Allen Key to remove the screws
and then connect the base with the bar

Note:

Don't fully tighten the right base for length adjustment
in step 6


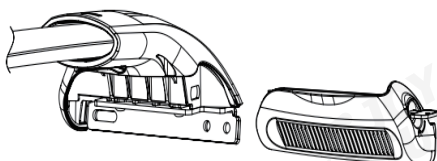
Step 2:

Use the key to unlock the base lock



Step 3:

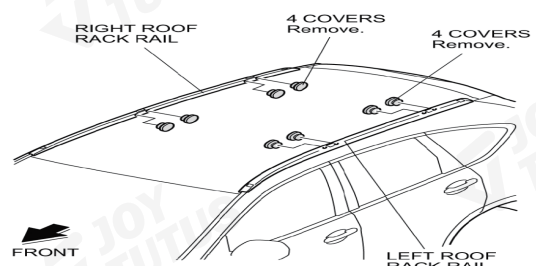
Remove the lock base



Step 4:

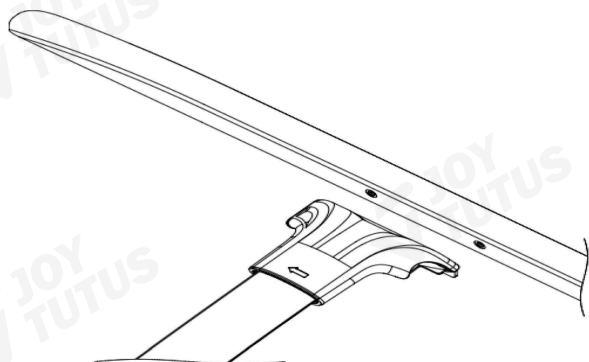
Remove the 4 covers from the side rails

Note: If no covers, skip this step

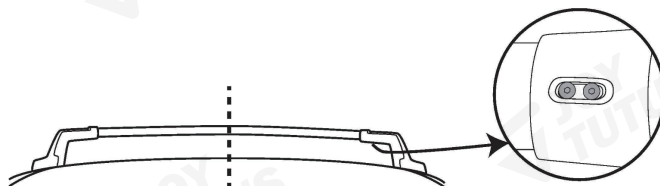


Step 5:

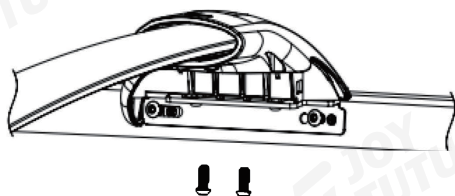
Position the crossbar onto the roof rail

**Step 6:**

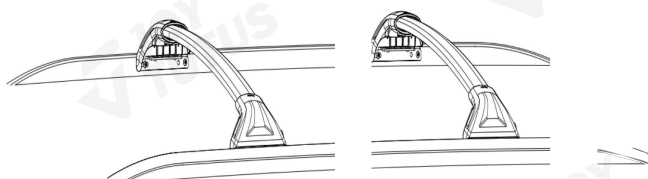
Adjust the length of the crossbar to fit your car by adjusting the base, and then tighten the bolt on all bases using 4mm Allen Key

**Step 7:**

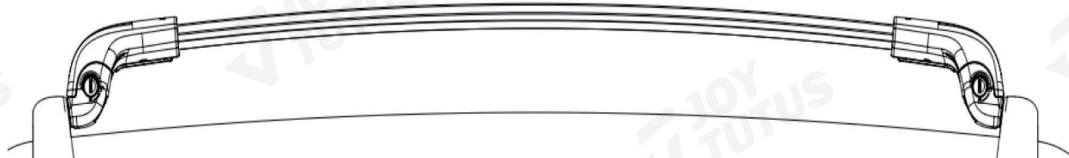
Adjust the screws of the base to fit the rails of the car, and tighten the screws after adjustment

**Step 8:**

Check all four clamps are tight and fully locked

**Step 9:**

Put the cover back and lock it

**Warrant:**

- Place a towel or mat before installation to prevent damage to the car roof;
- The weight of the cargo must not exceed the maximum weight limit of 100 kg(220 lbs);
- Check the cross bar mounting bolts frequently for security, re-tighten it if necessary;
- If this product is missing parts or defective, please reach out to us for free part replacement.

If this product is found incompatible with your vehicle, you could also contact us to see if we have other models for your vehicle.

Customer Support

Contact us by email: service@joytutus.com

JOYTUTUS help center:
<http://support.joytutus.com>



If you have any questions, please visit Joytutus website for quick response.
Web: www.joytutus.com

