


IMPORTANT

Before installation, please make sure that all accessories are ready.
(As shown in the picture below).

PRODUCT INFORMATION


1 Ski Main Rack *2

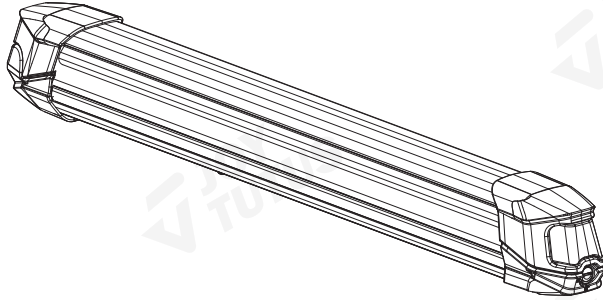

2 Support *4



3 Wrench *1



4 Key *4



Estimated installation time:

30 minutes

(It is recommended that
2 people install it together.)

CUSTOMER SUPPORT



Contact us by email:
service@joytutus.com


JOYTUTUS help center:






<http://support.joytutus.com>

INSTALLATION COMPLETION DIAGRAM

Video QR code

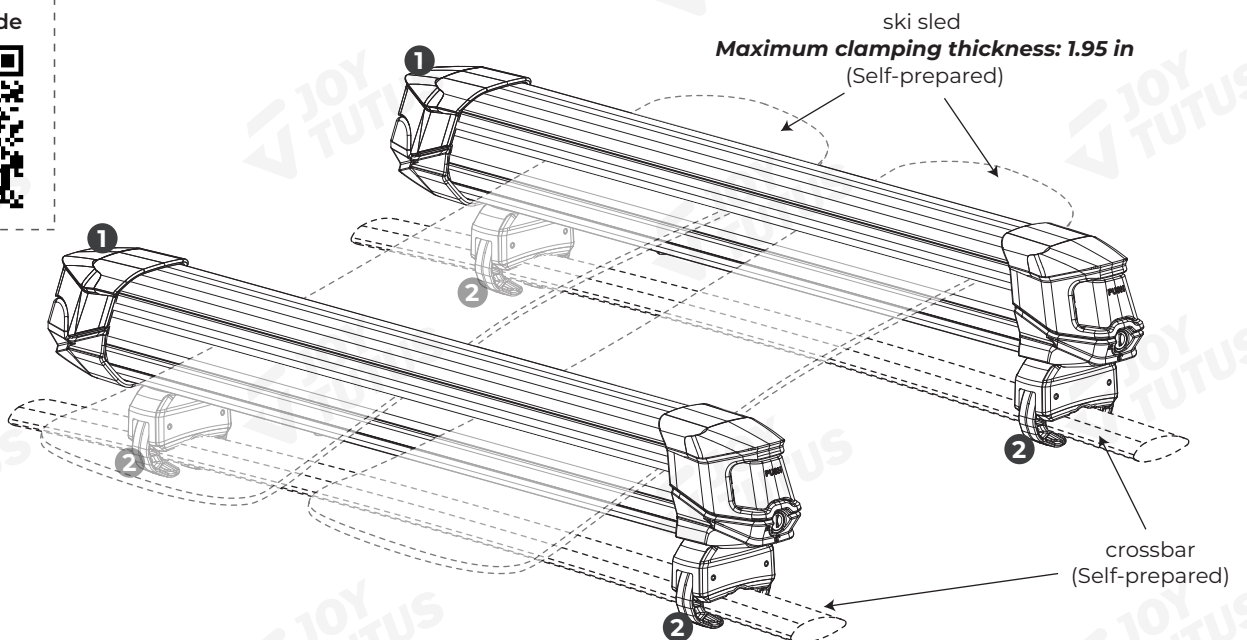


ADAPTED CROSSBAR

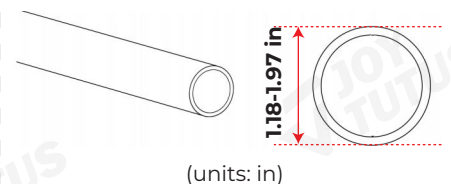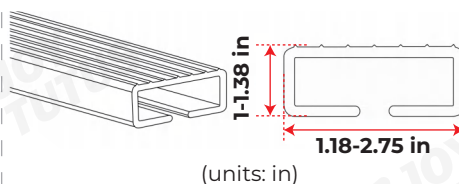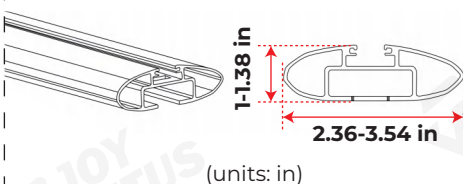

TIP BEFORE ASSEMBLY

Before assembly, measure whether the width of the base is suitable for your crossbar. If the base is too wide to install, you can use a second set of base mounting holes.

(Note: Regardless of which set of mounting holes you use, please plug the other holes with rubber plugs.)

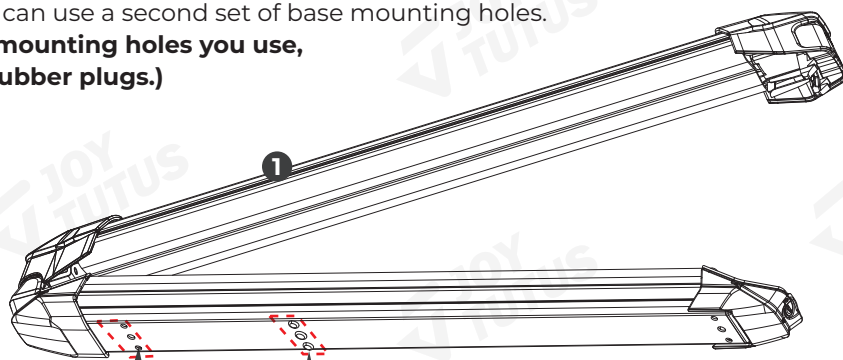



For longer cross bar

For shorter cross bar

INSTALLATION METHOD


STEP 1:

Required accessories:

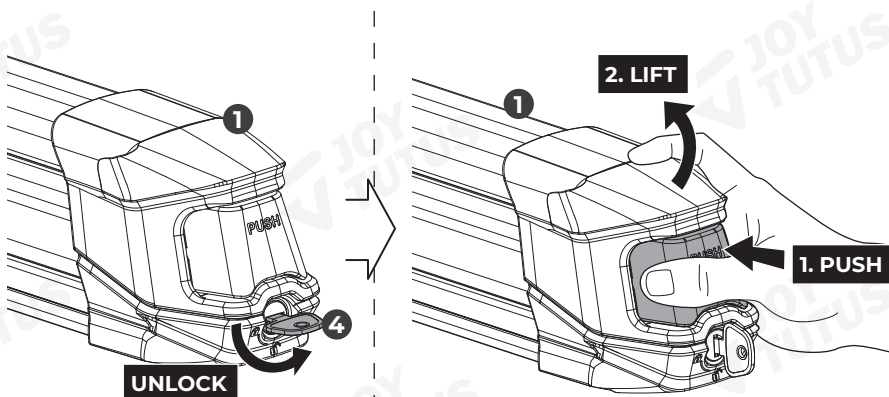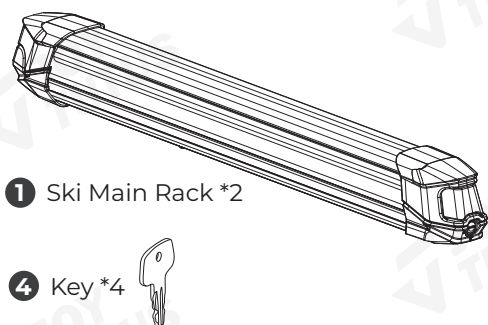


STEP 2:



Required accessories:

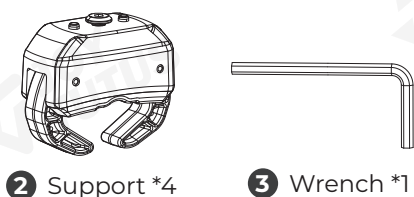


Premise:

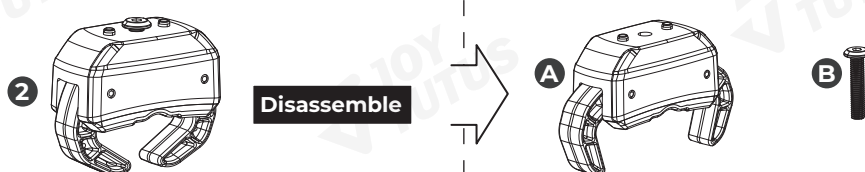


STEP 2-1:

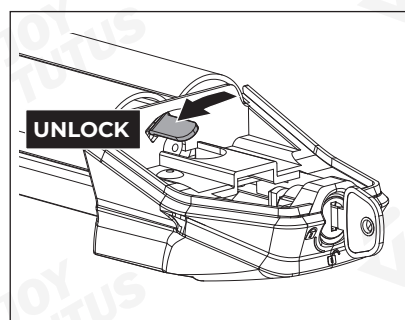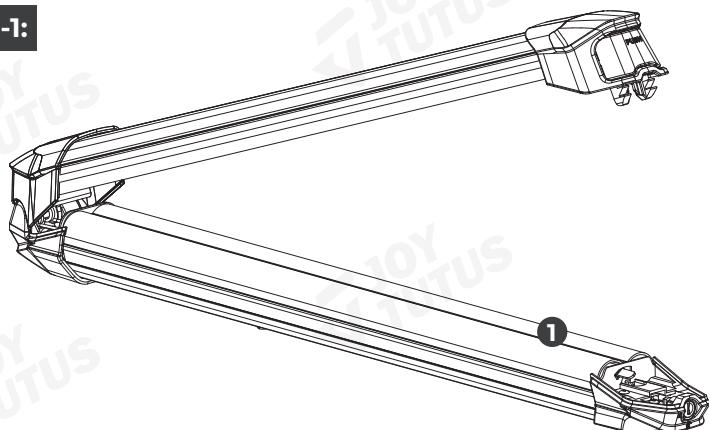


STEP 2-2:

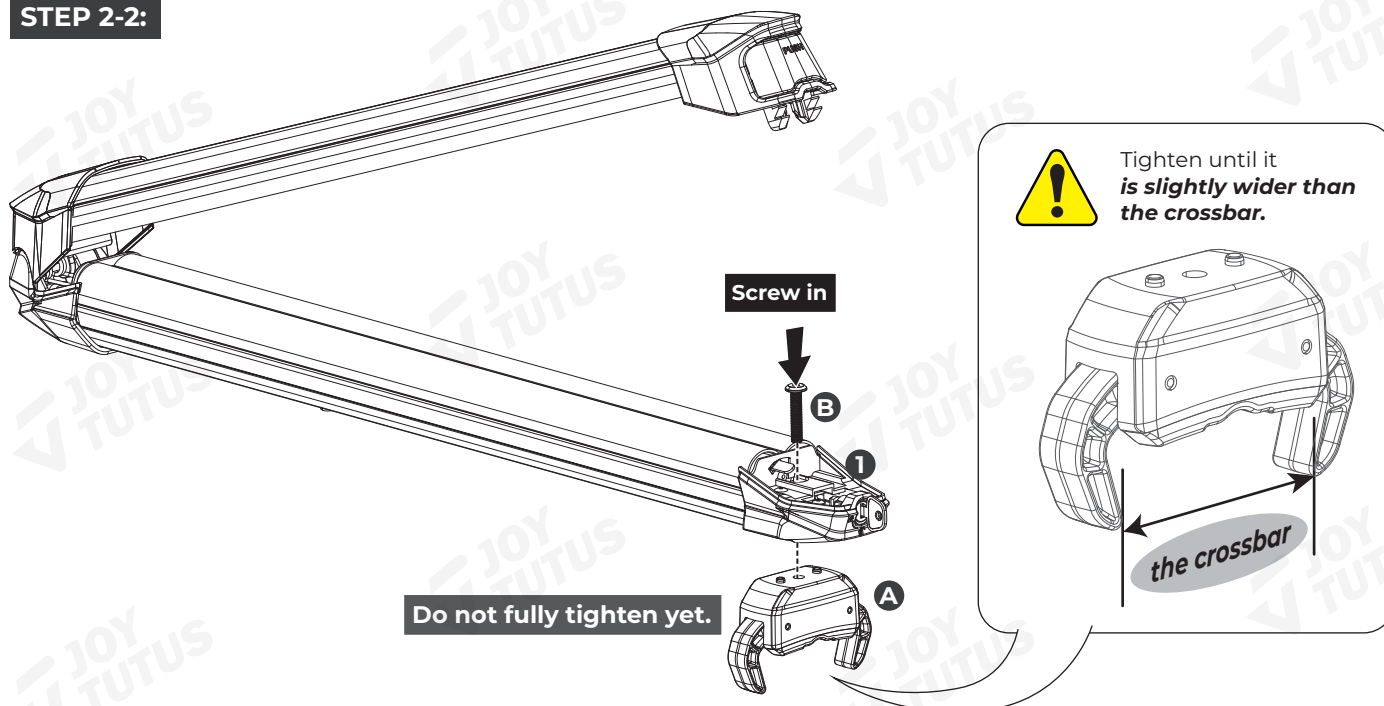


STEP 2-3:

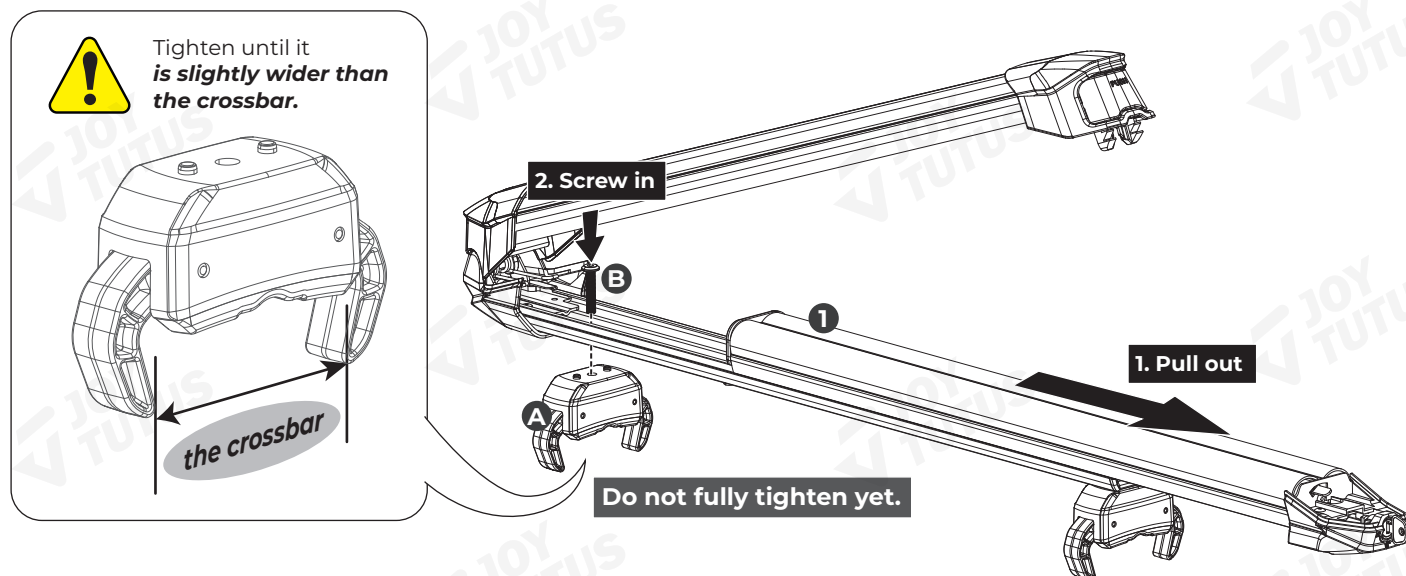

STEP 2-4:

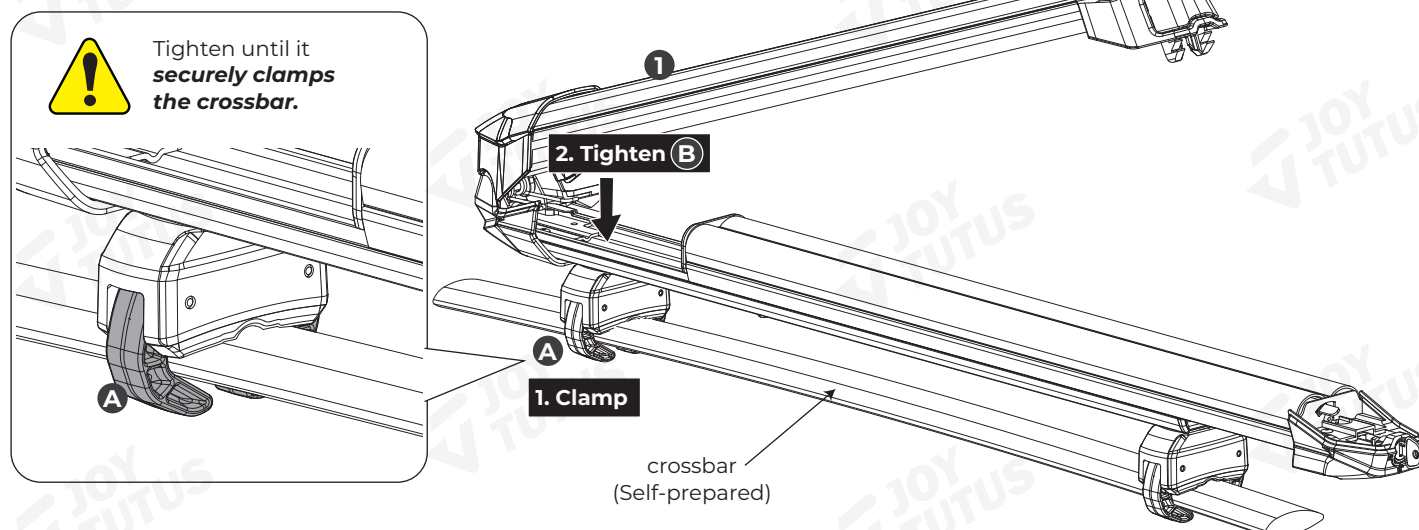


STEP 2-5:

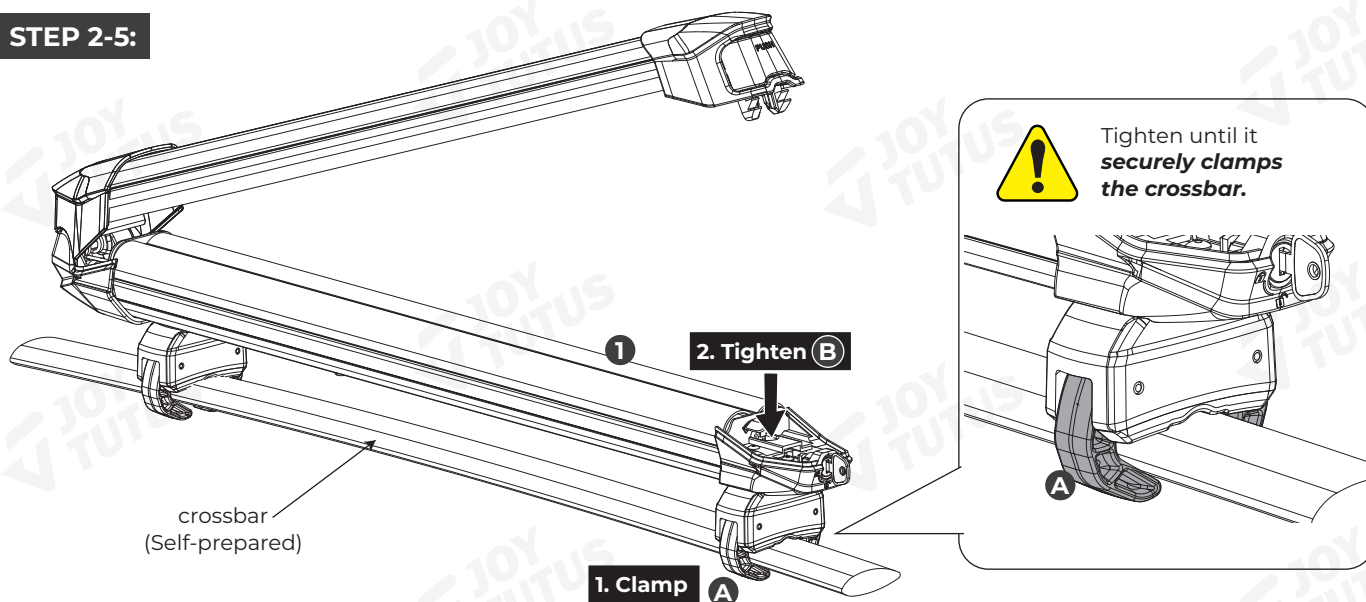

Check whether the ski rack is securely fixed onto the crossbar. Only proceed with the next steps if it is secure.

STEP 3:

The slide rail can be pulled out for placing the ski sled.

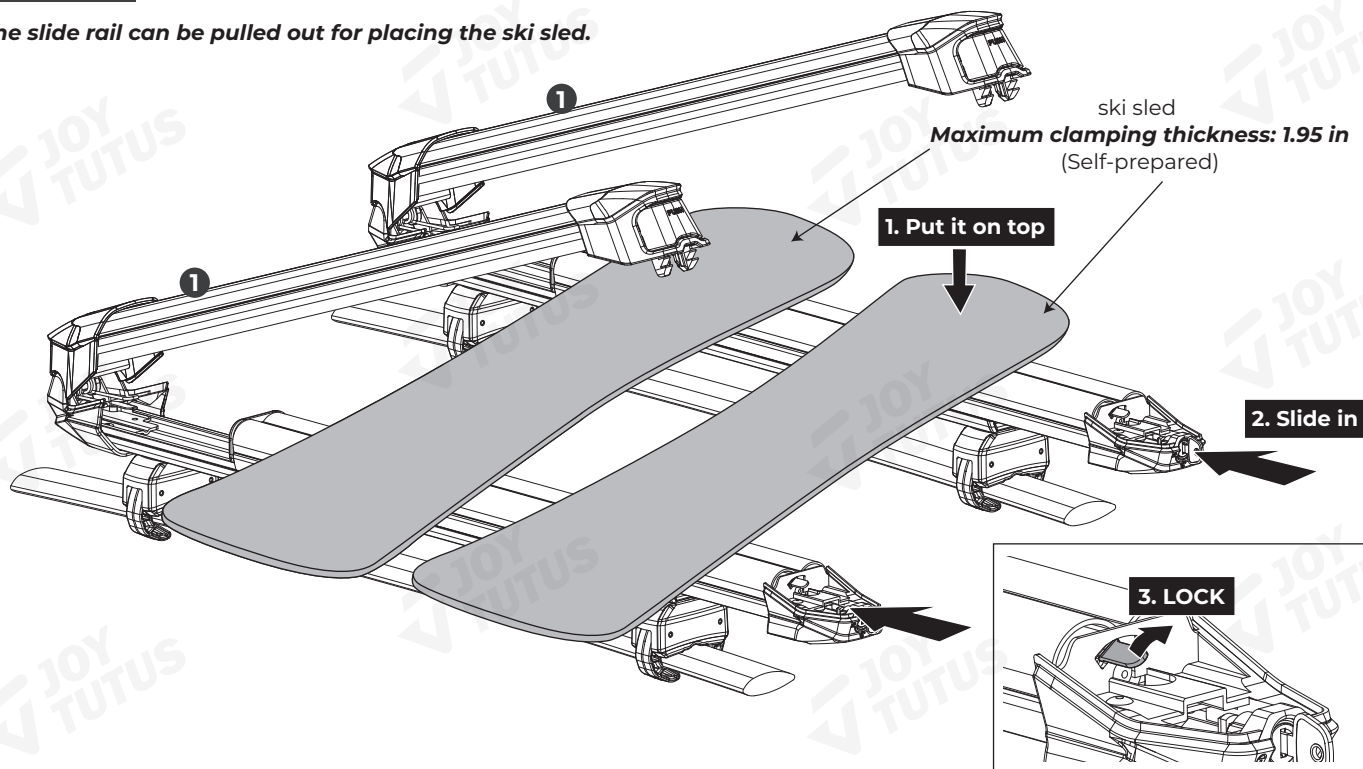


After the lock button is engaged, verify that the slide rail does not move. If movement is detected, the rail has not been fully pushed into position.


STEP 4:




Make sure the key is vertical.

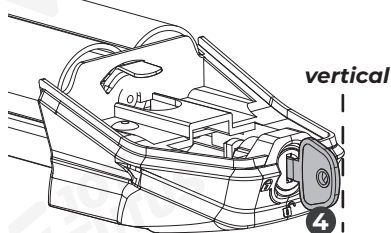

If the upper clamp is not fastened and the lower clamp is released, the upper clamp will spring up when you let go.

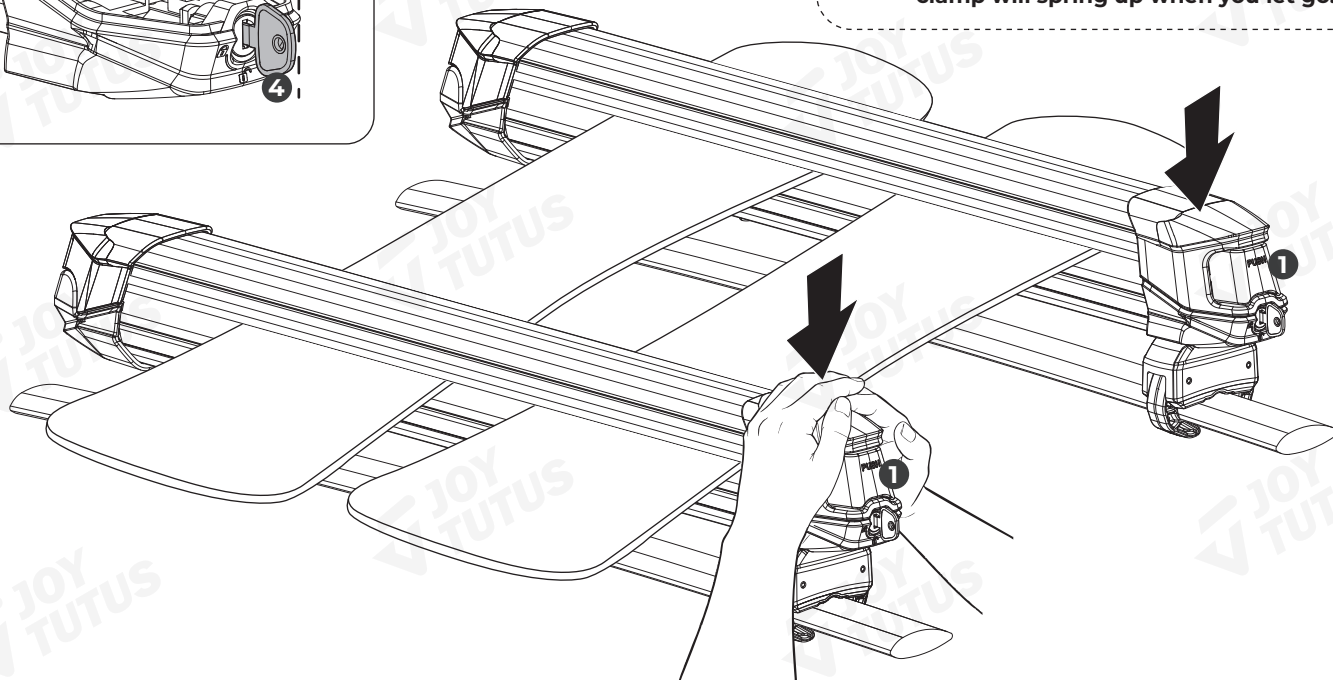


STEP 5:

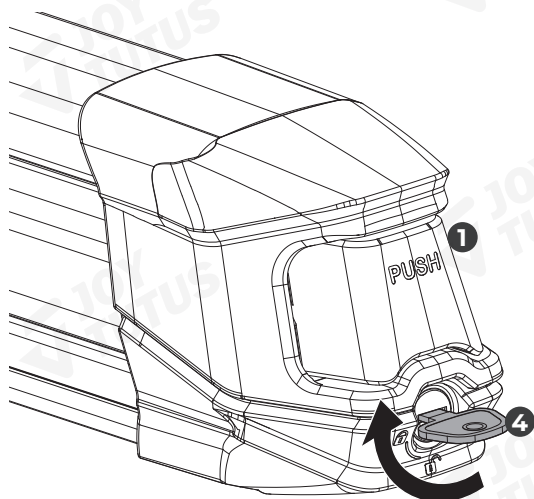


Finally:
Lock the unit and take out the key [4].
Store [4] properly.



SAFE TIPS

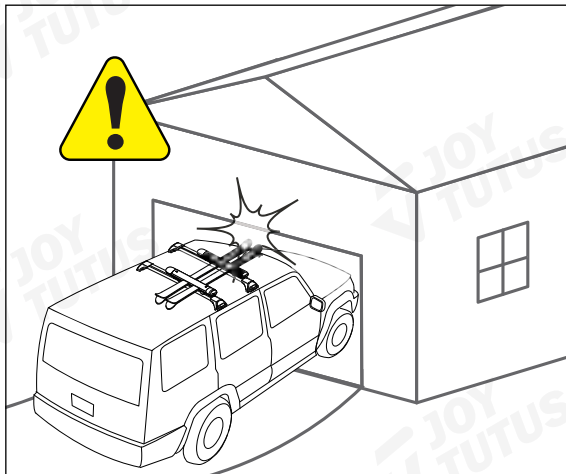

Pay attention to the height limit!

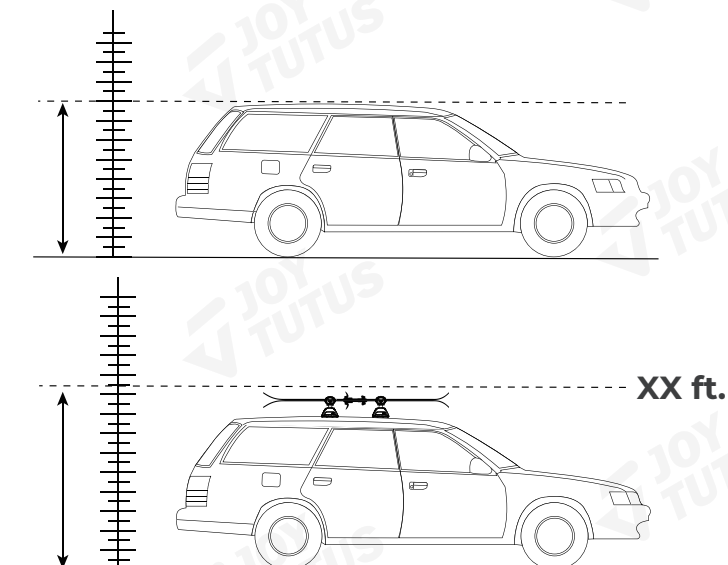

Place it correctly and do not tilt it

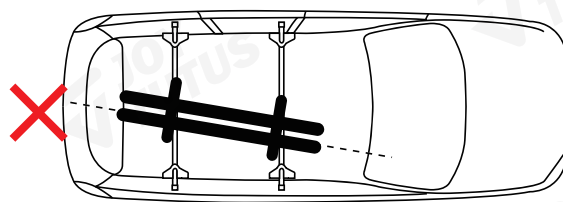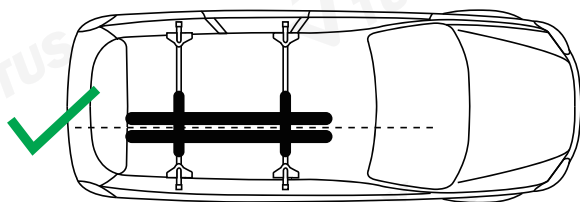

Be careful not to collide with the tailgate



Remove it before washing the vehicle

