

IMPORTANT

Before installation, please make sure that all accessories are ready. (As shown in the picture below).

NOTES

- 1) Make sure the vehicle is completely clean and dry in the area the part is to be installed.
- 2) Ensure the vehicle is properly protected in the area that the accessory is to be installed.
- 3) Any weight carried on the vehicle on vehicle will adversely affect its handling particularly in cornering or in a crosswind and the vehicle should therefore be driven with increased caution.
- 4) Loads must be evenly distributed and secured.

If you have any concern of installing or using this product Please feel free to contact us via service@joytutus.com

Estimated installation time:

25 minutes

CUSTOMER SUPPORT



Contact us by email:
service@joytutus.com

JOYTUTUS help center:




<http://support.joytutus.com>


PRODUCT INFORMATION



1 Crossbar x 2



2 Mounting Bracket x 4

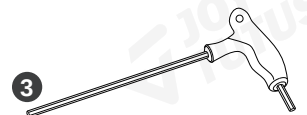

3 L-shaped Handle Wrench x 1




4 Open-End Double Wrench x 1




5 Key x 1

NOTE

The buckle can be lifted and pushed into the slot.
It can be threaded with self-provided ropes to secure items.

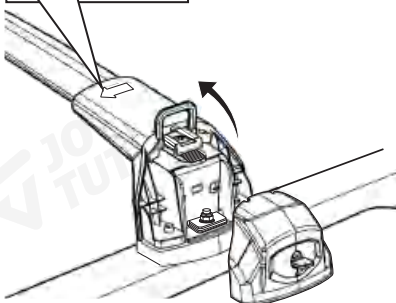

Usage Method 1

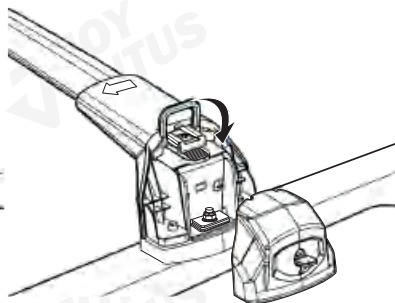

Usage Method 2

Front



Rear


The round head of the crossbar faces to the front and the pointy head faces to the rear.




The sealing tape can be cut down the center so that the T-bolt can be slid into the crossbar.

✓ INSTALLATION METHOD



STEP 1 Use the key to unlock the base lock, then insert the bottom clamp upward through the base. Tighten the nut with a few turns, don't fully tighten.

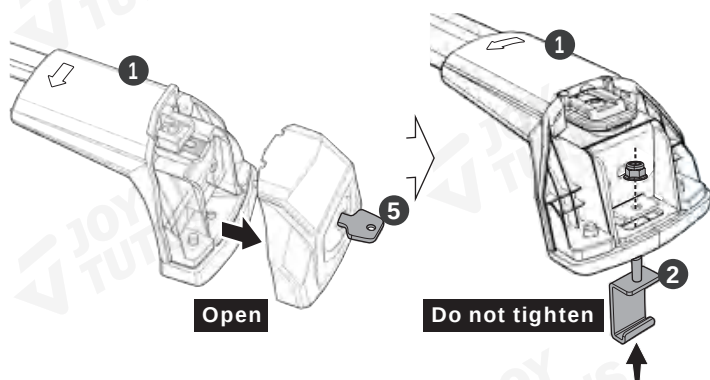

STEP 2 Use the Allen key to loosen the screw then the left and right sides are adjustable.

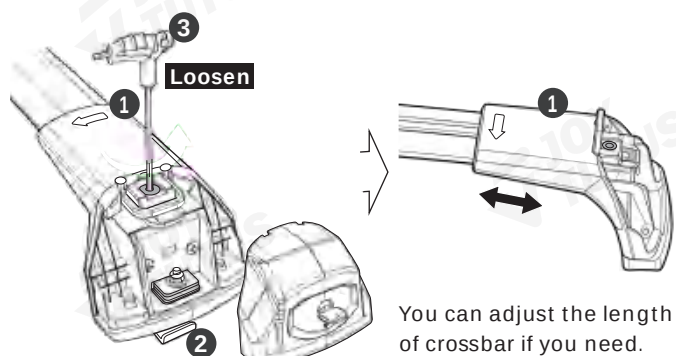


STEP 3 Place the cross bar onto the side rails, check the installation direction, adjust them to the desired length, and then tighten the nuts.

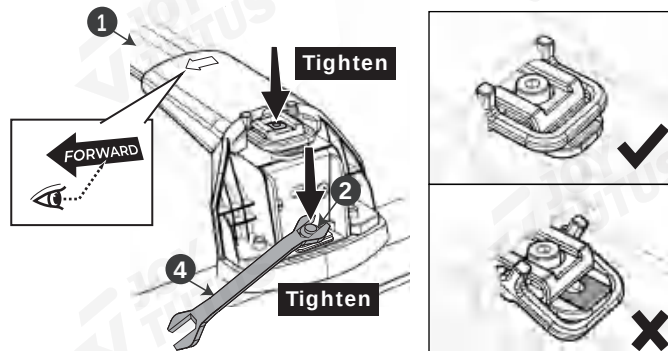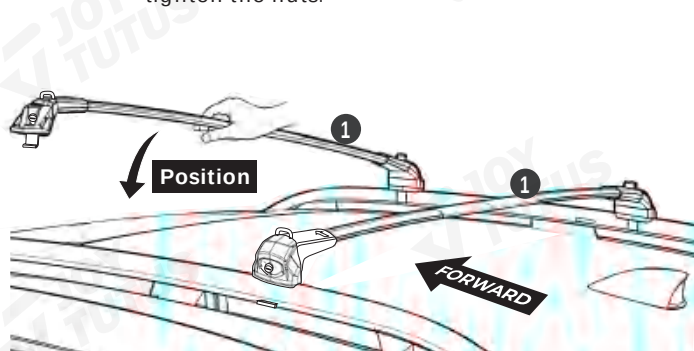


Note: Before tightening, push the front hook inward; it must not be caught underneath.

STEP 4 Put the cover back and lock it.

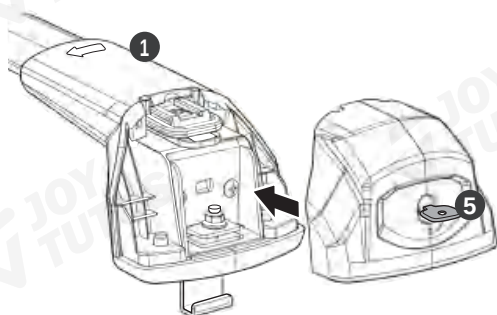

TIP After the installation is completed, all the accessories should be neatly organized and stored.

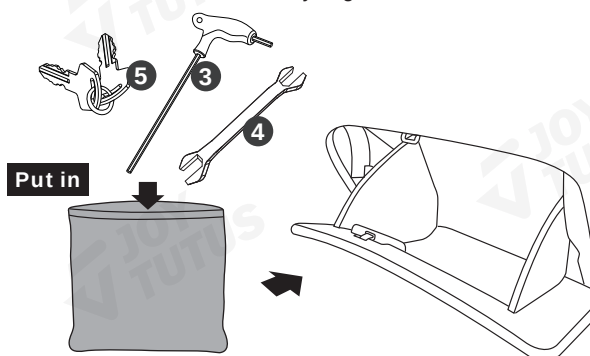

STEP 5 Ensure all components are firmly secured.

