



✓ IMPORTANT

Before installation, please make sure that all accessories are ready.
(As shown in the picture below).

✓ PRODUCT INFORMATION

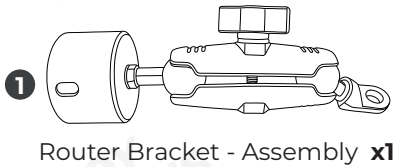

Estimated installation time:

10 minutes

CUSTOMER SUPPORT

 Contact us by email:
service@joytutus.com


JOYTUTUS help center:




<http://support.joytutus.com>

✓ INSTALLATION COMPLETION DIAGRAM

The Vehicle Model Is Wrangler JI:

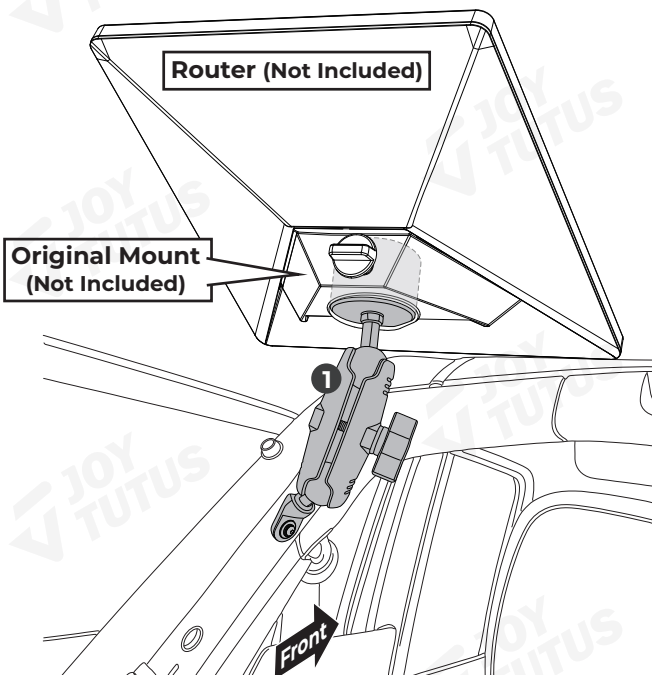


The Vehicle Model Is Wrangler Jk:

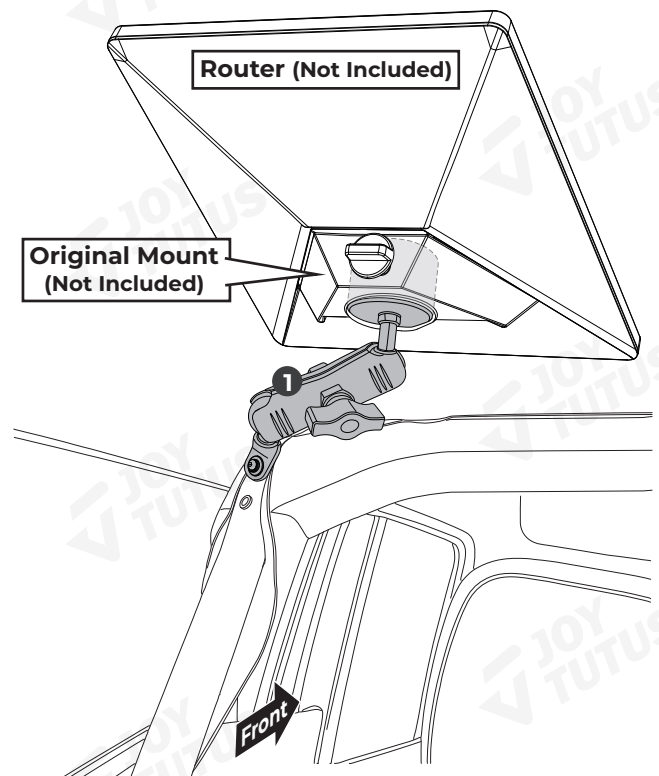



✓ INSTALLATION METHOD

PREPARATION

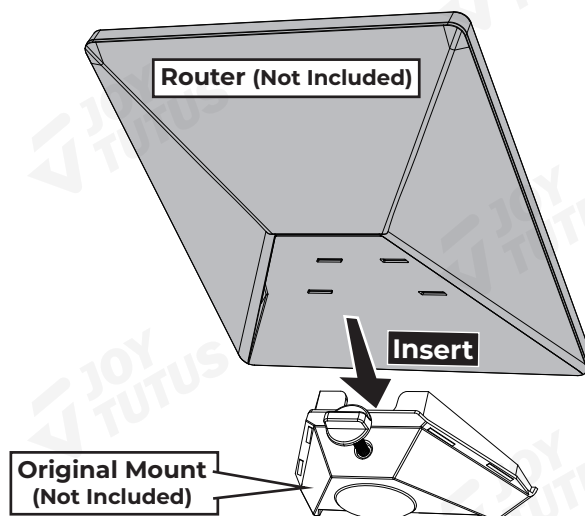

THE VEHICLE MODEL IS WRANGLER JL:

Required accessories:

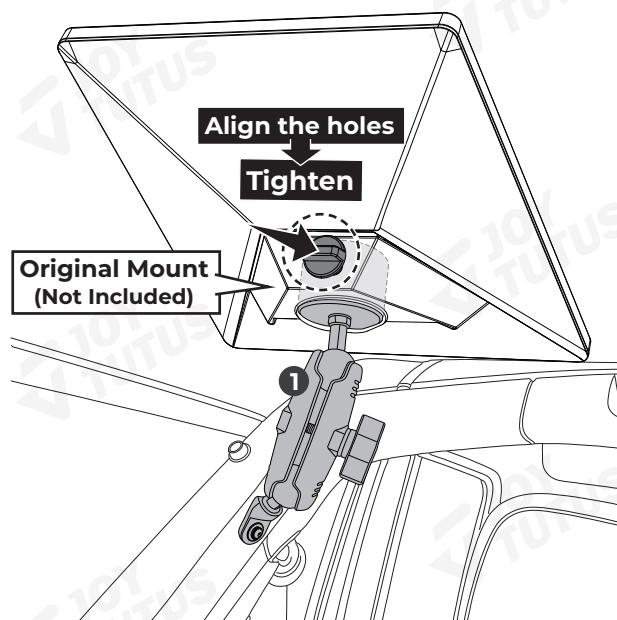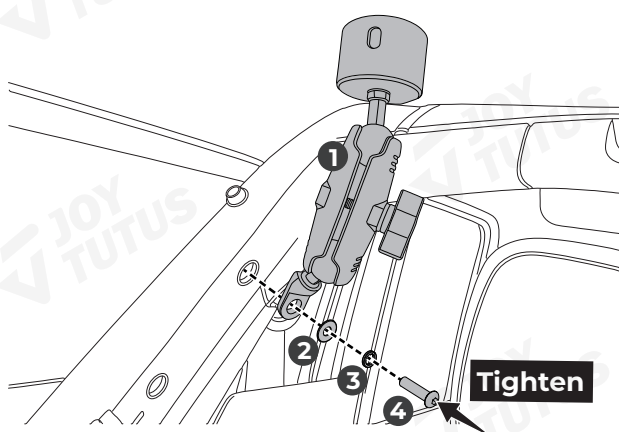


Adjust the bracket angle, tighten the thumbscrew at ①, connect the cables, and the installation is complete!



THE VEHICLE MODEL IS WRANGLER JK:

STEP 1:

Required accessories:



13mm Tubular
Box Wrench **x1**

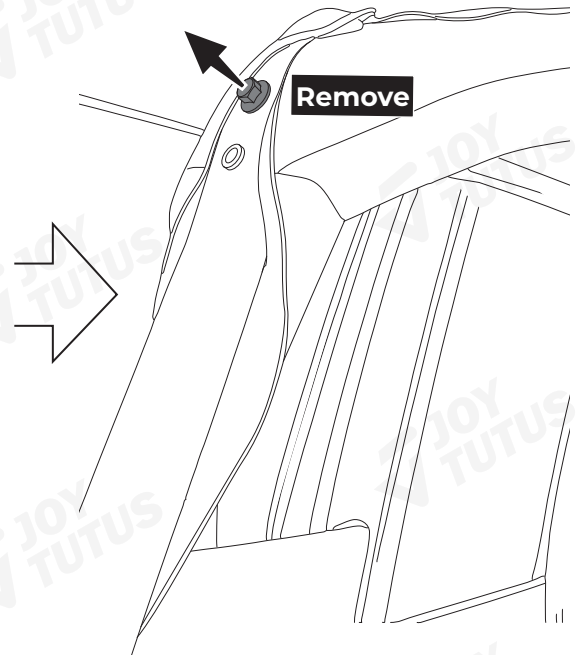
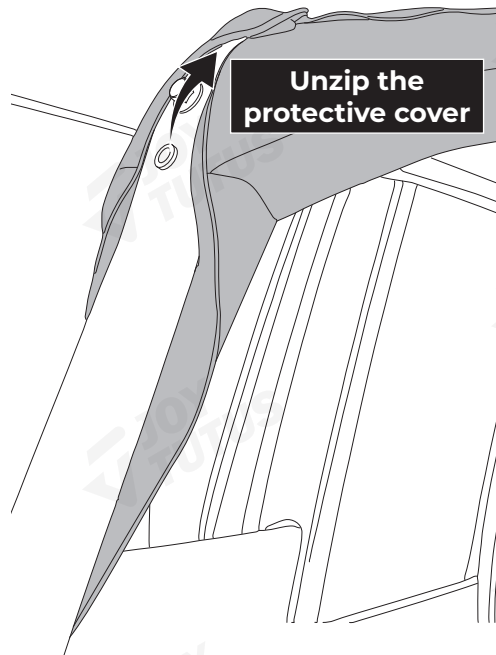


STEP 2:

Required accessories:



5mm Hexagon
Socket Wrench **x1**

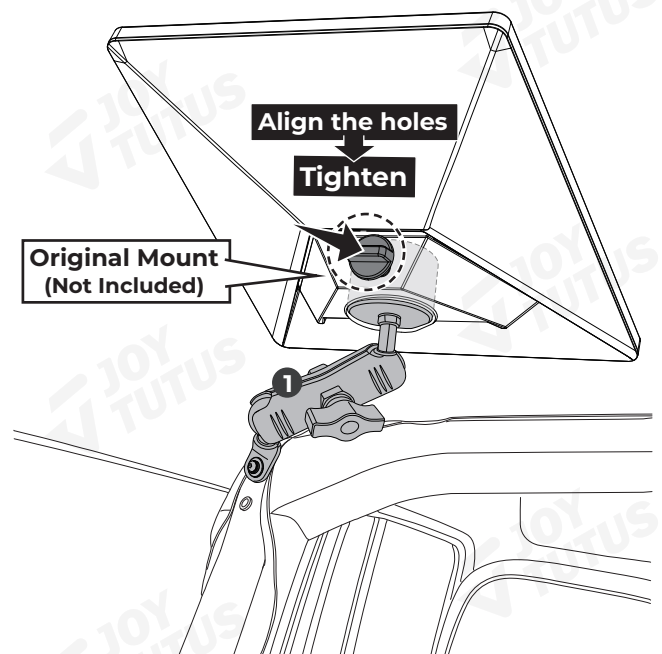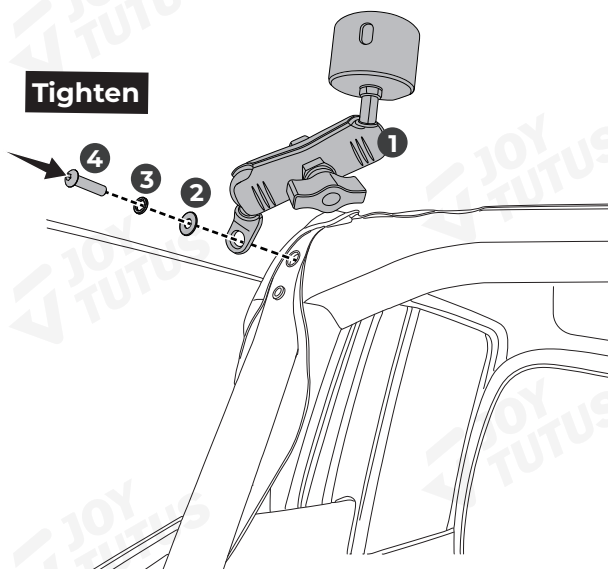

 **Adjust the bracket angle, tighten the thumbscrew at ①, connect the cables, and the installation is complete!**