



IMPORTANT

Before installation, please make sure that all accessories are ready.
(As shown in the picture below).

Estimated installation time:


15-45 minutes

PRODUCT INFORMATION

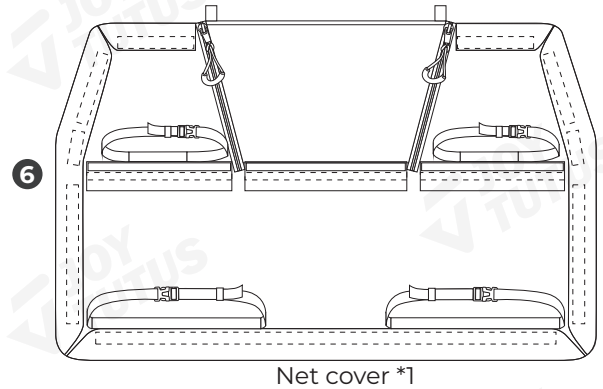

INSTALLATION COMPLETION DIAGRAM

Installation video:

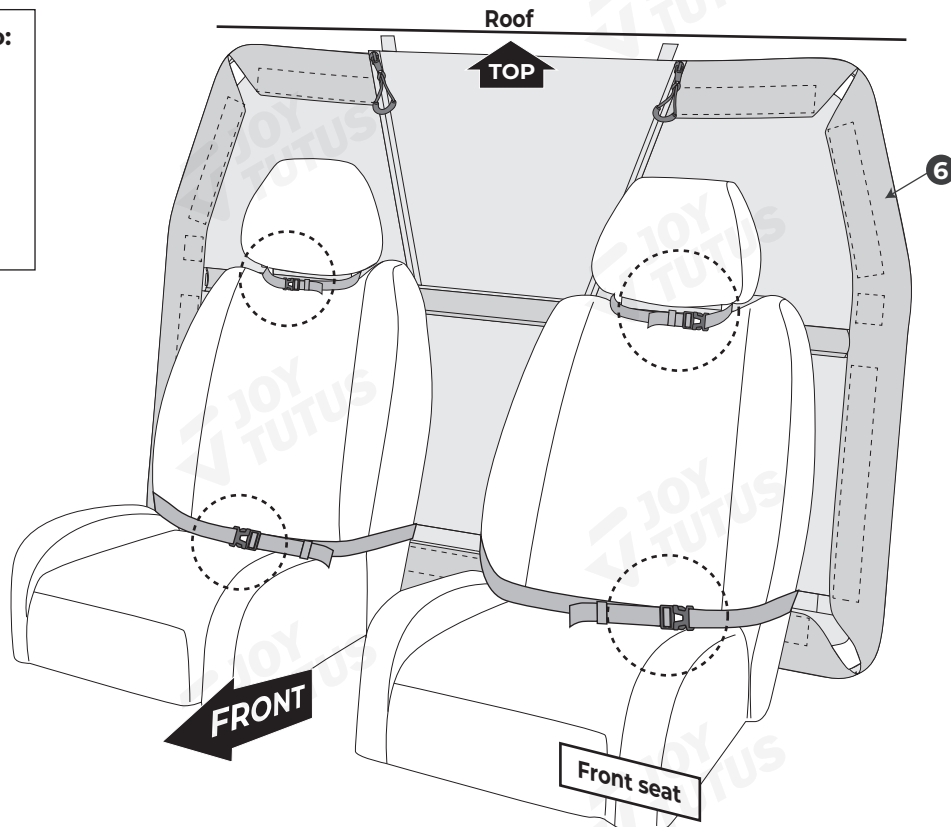

Customer Support





Contact us by email: service@joytutus.com

JOYTUTUS help center:
<http://support.joytutus.com>





✓ INSTALLATION METHOD



STEP 1 Place the brackets one by one on a flat surface.

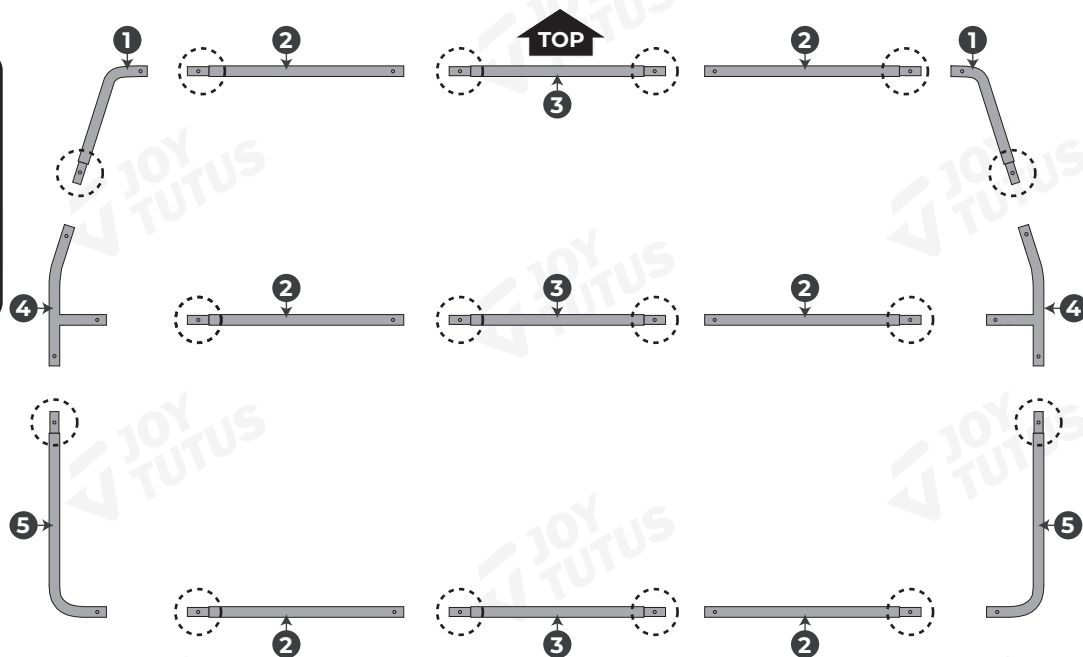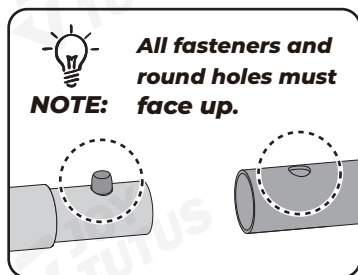




STEP 2 Assemble the bracket into three sections: **top**, **middle**, and **bottom**.

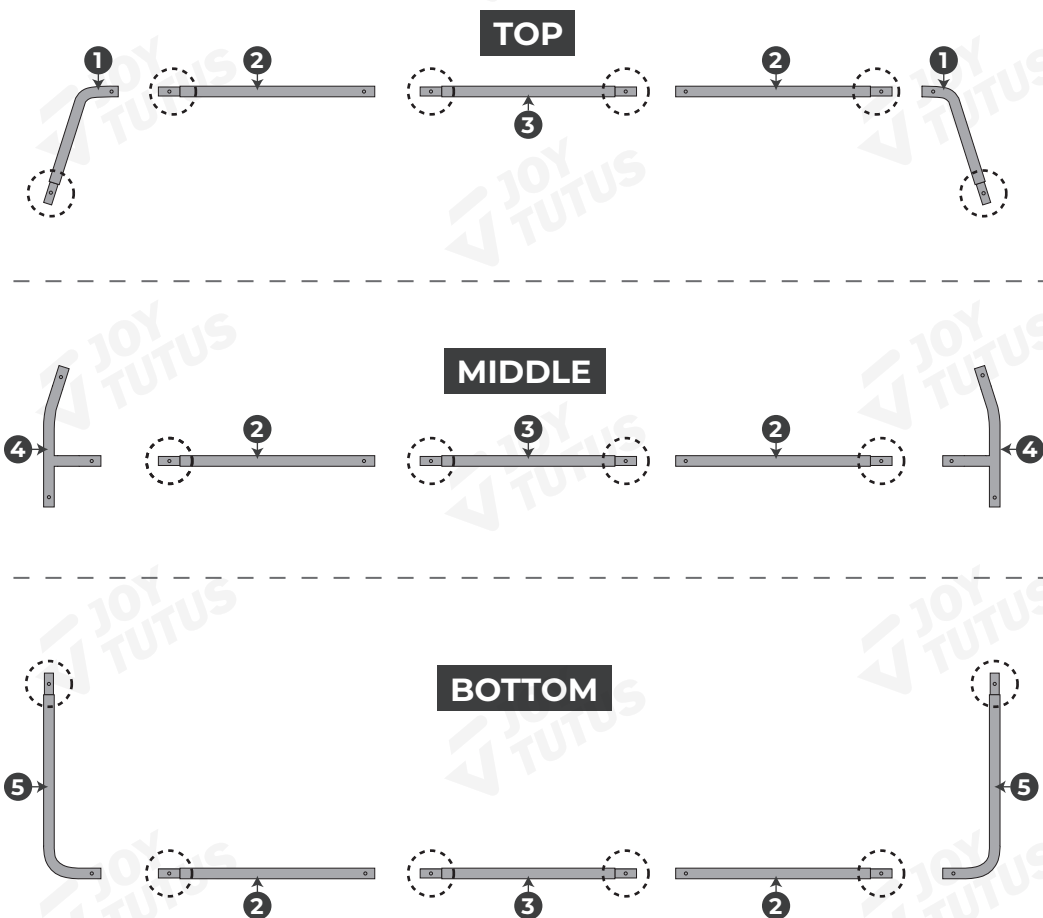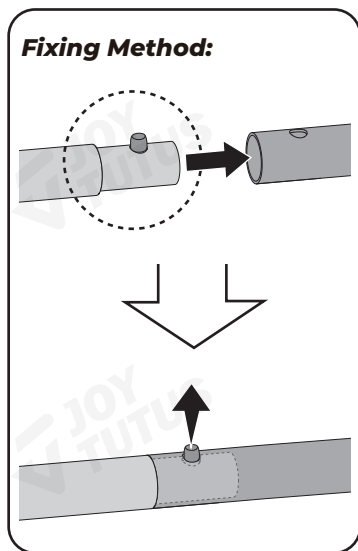

STEP 3 Assemble the **top, middle, and bottom** brackets together.

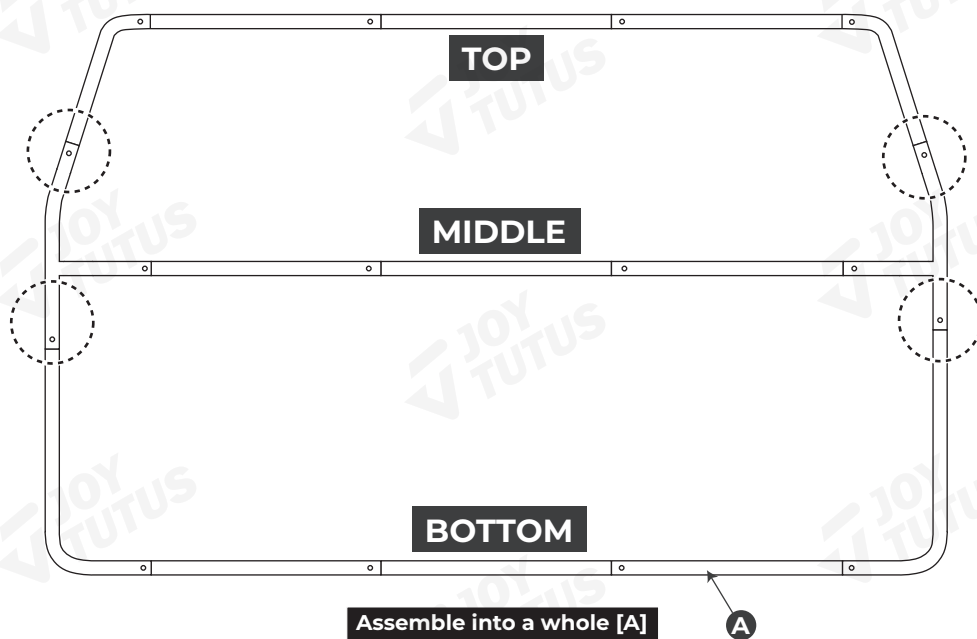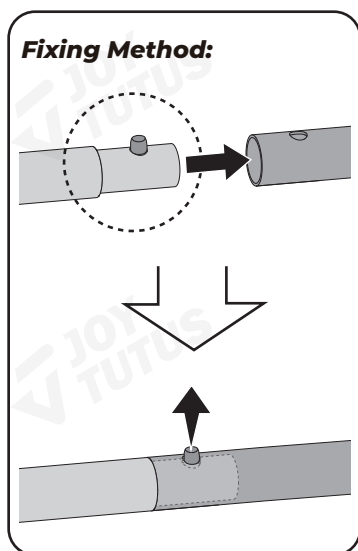


STEP 4 Open the hook-and-loop fasteners one by one.

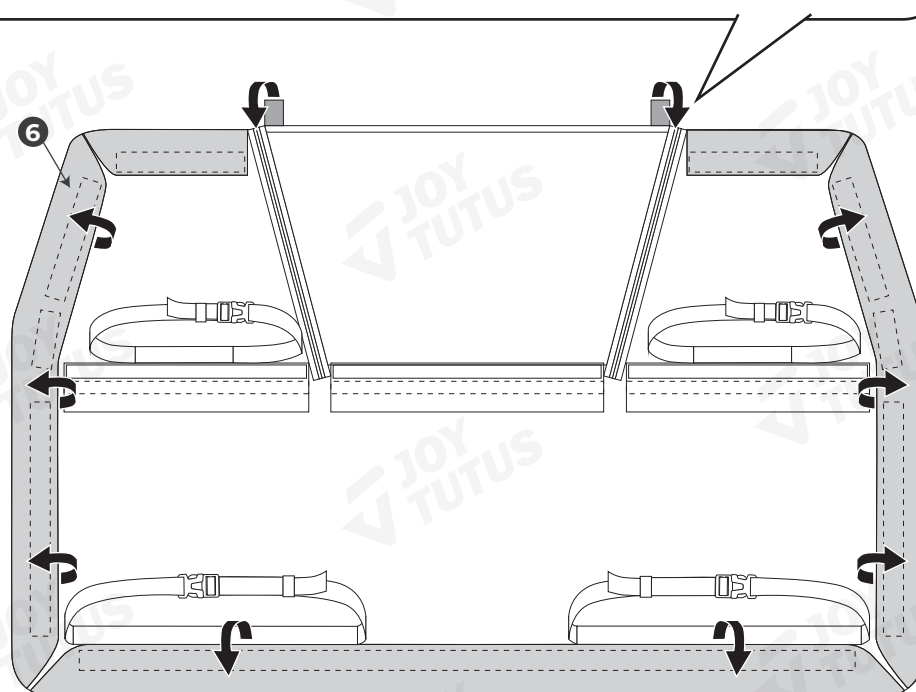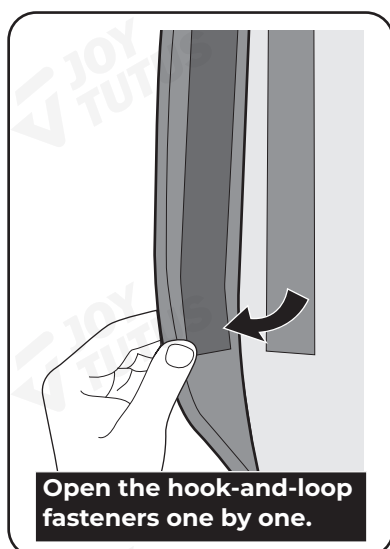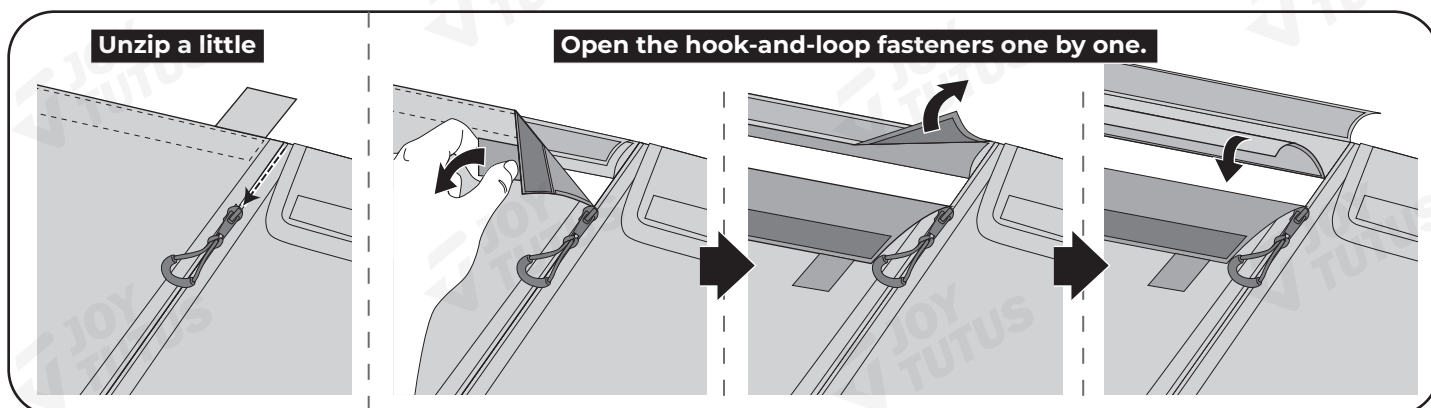


STEP 5 Pay attention to the orientation of the pipe fitting. Place [A] on [6] and stick the hook-and-loop fasteners around [6] tightly. The assembly is now complete.





NOTE:

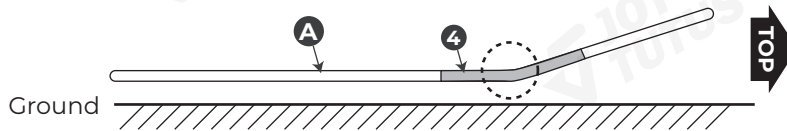



Close the hook-and-loop fasteners one by one.

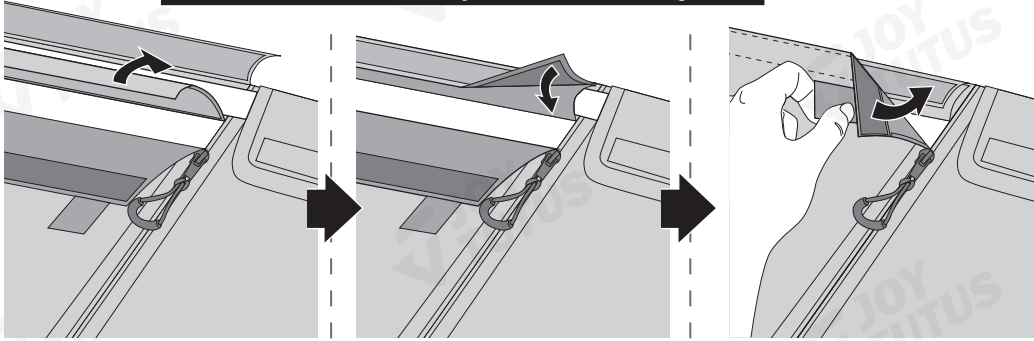



Zip up

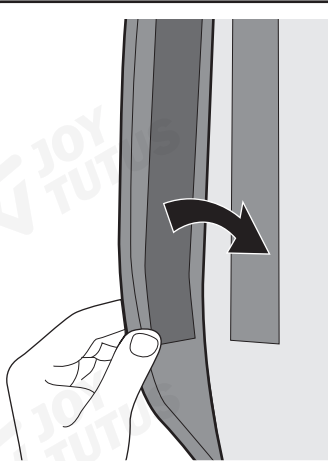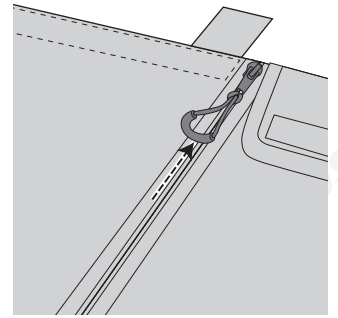

Close the hook-and-loop fasteners one by one.

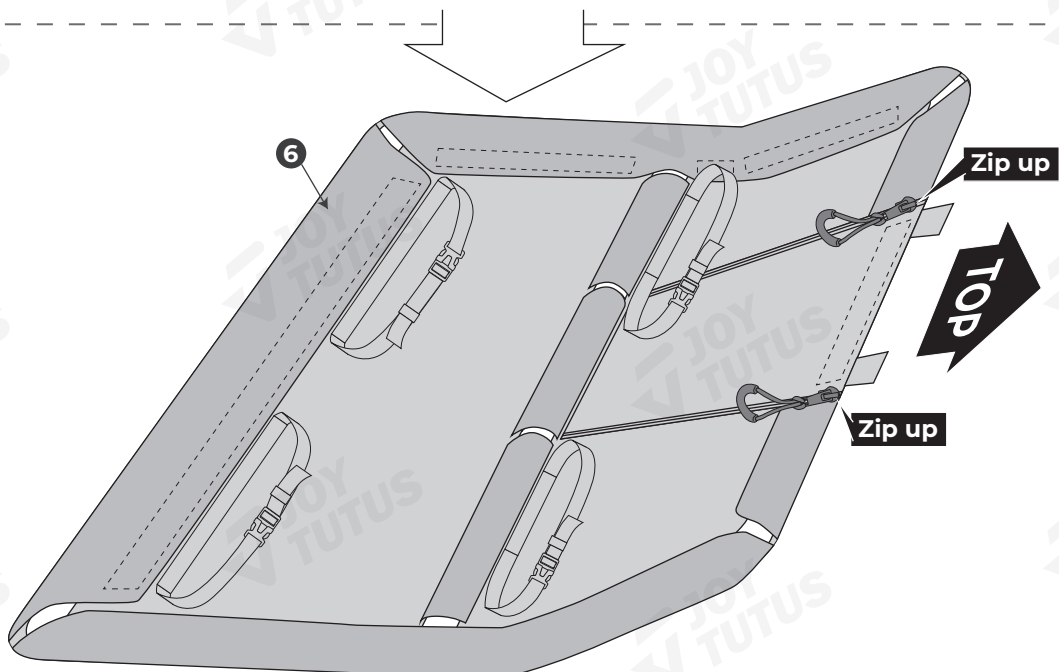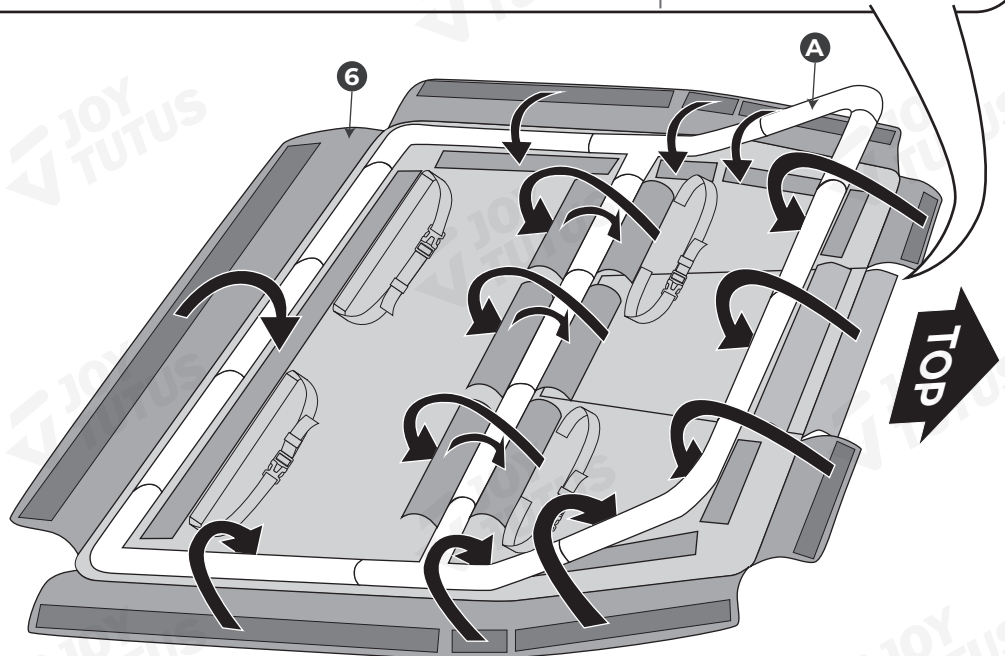

STEP 6 The overall frame is supported to the top of the roof, and the fastener webbing is installed from the top down. (LOGO facing back).

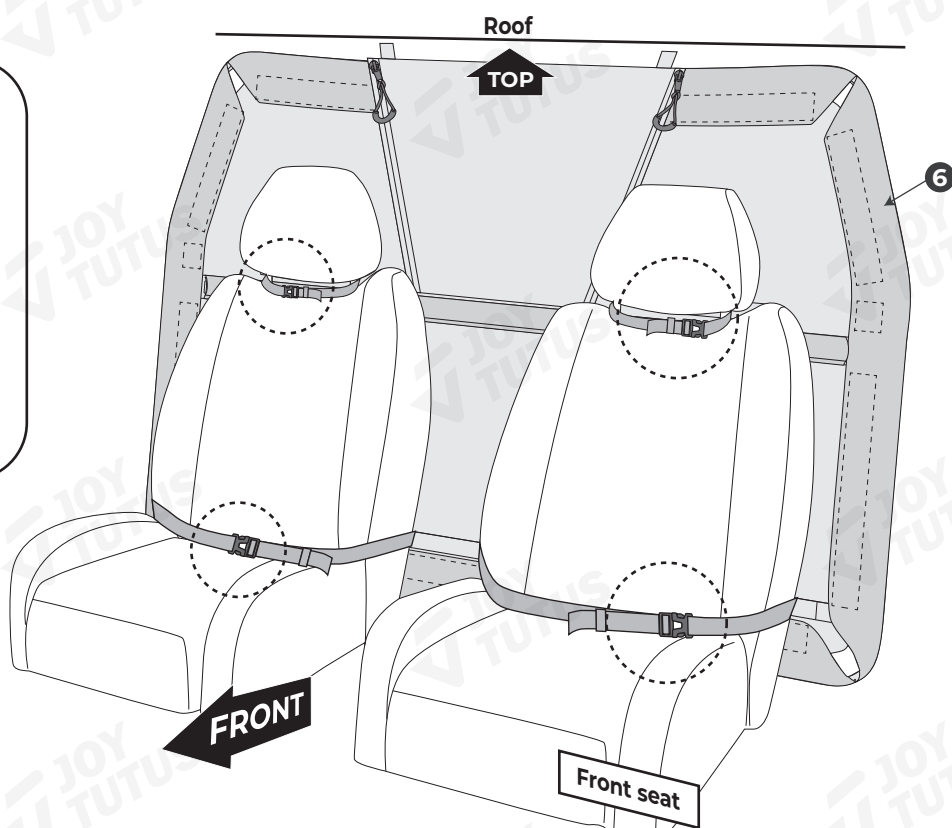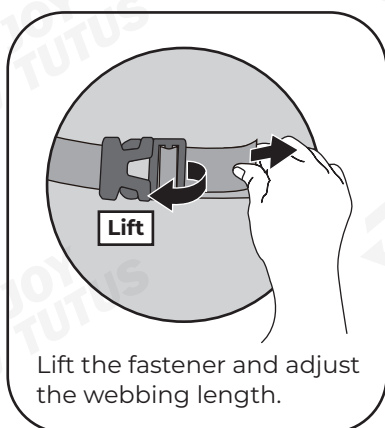

TIP Undo the hook-and-loop fastener, then pull the window zipper open to open the window.

