


IMPORTANT



Before installation, please make sure that all accessories are ready. (As shown in the picture below).

PRODUCT INFORMATION

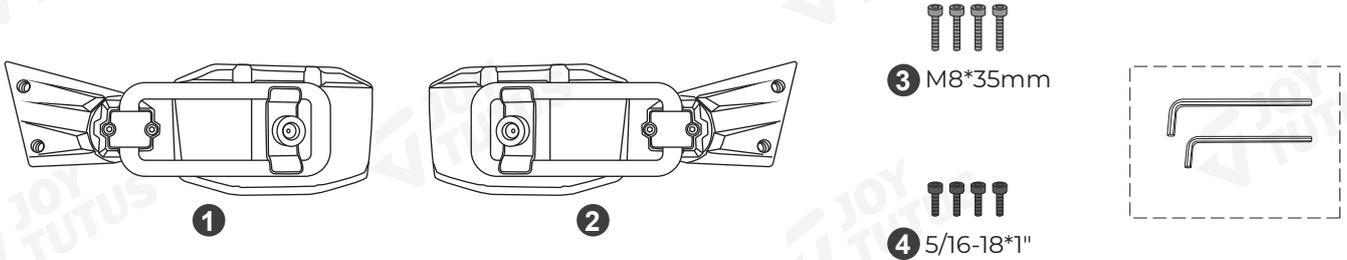

INSTALLATION METHOD

Wrangler JK JKU

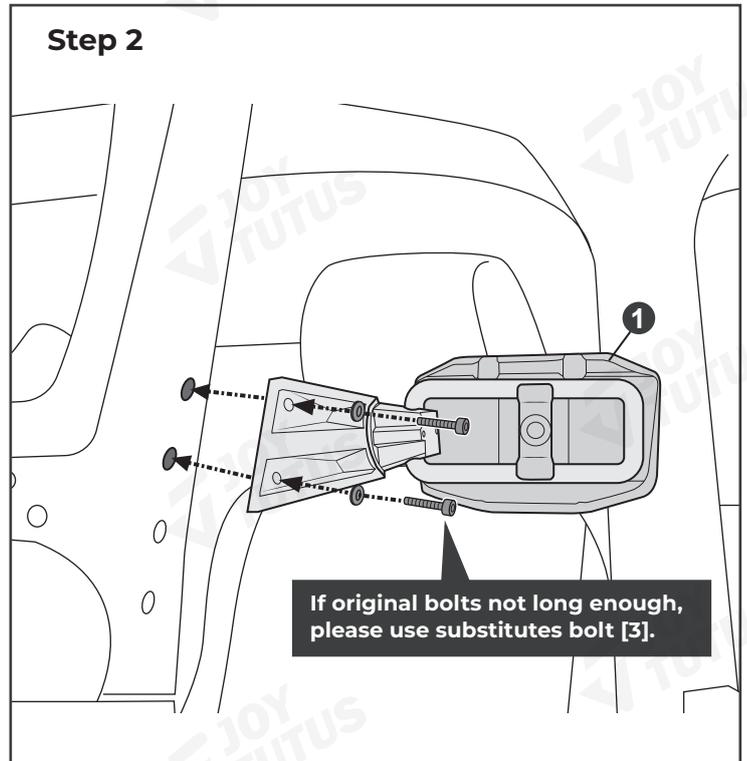
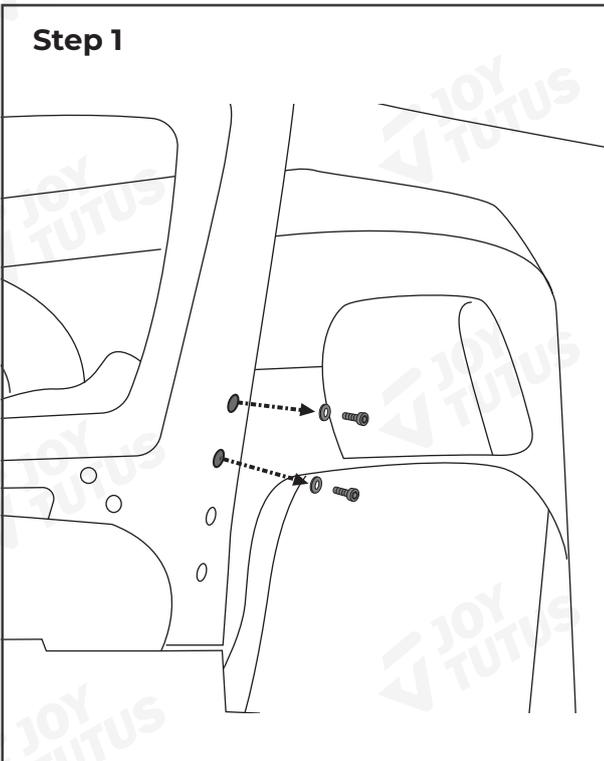


STEP 1: Remove two original flush mount torx head bolts and washers just in front of door hinge.



STEP 2: Use the two original bolts and washers just removed to fix the bracket on the flat side.
If original bolts not long enough, please use substitutes bolt [3].

STEP 3: Repeat steps 1-2 to install the other side.

METHOD ONE

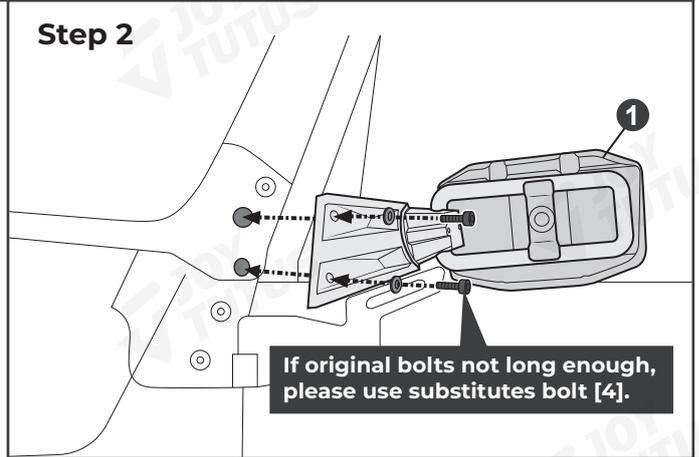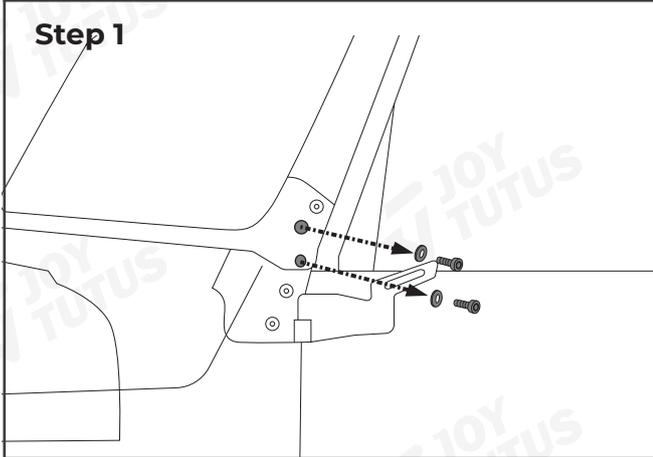

METHOD TWO

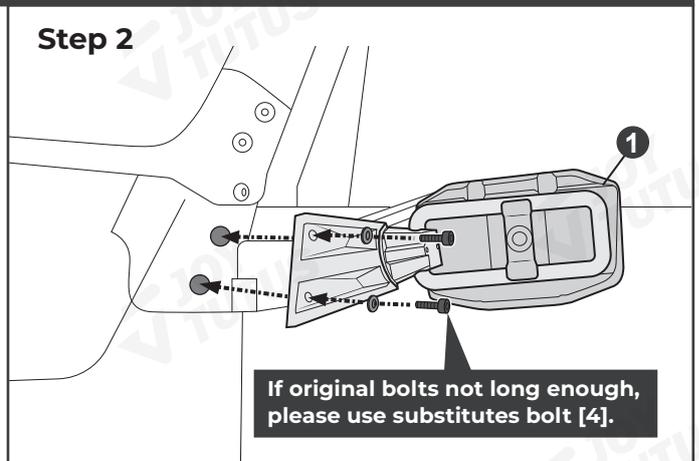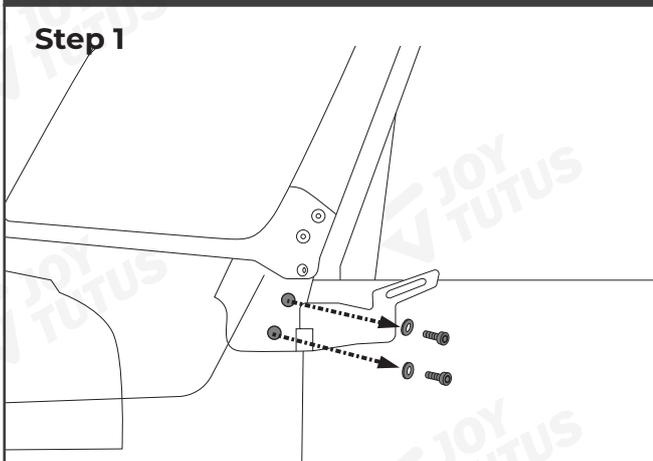


STEP 1: Remove two original flush mount torx head bolts and washers just in front of door hinge.

STEP 2: Use the two original bolts and washers just removed to fix the bracket on the flat side.
If original bolts not long enough, please use substitutes bolt [4].

STEP3: Repeat steps 1-2 to install the other side.


√ FUNCTION

01)

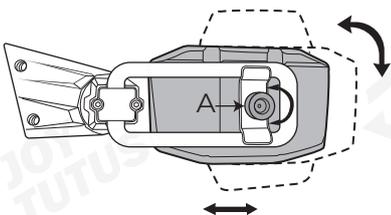


01: Adjust the screw A to change the direction or position of the mirror.

02)

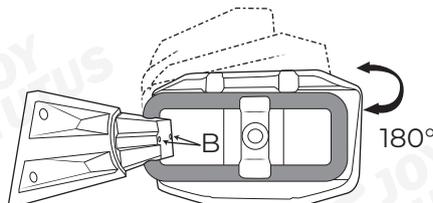

02: Adjust the screw B, you can swing frame front and back by 180°.

03)



03: You can swing bracket C front and back by 360°.

If you have any questions, please visit Joytutus website or email for quick response.

Web: www.joytutus.com

Email: Service@joytutus.com