

IMPORTANT

Before installation, please make sure that all accessories are ready.
(As shown in the picture below).

Estimated
installation time:

5-10 minutes

CUSTOMER SUPPORT




Contact us by email:
service@joytutus.com

JOYTUTUS help center:



<http://support.joytutus.com>


PRODUCT INFORMATION

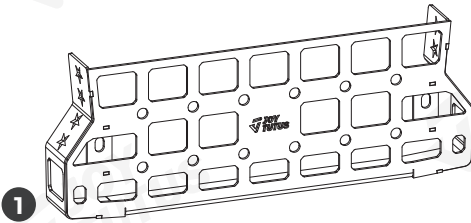

Main sheet
metal part **x2**



Sheet metal
part - L **x2**



Sheet metal
part - R **x2**




M6x25
screw **x4**




S=4 hex
wrench **x1**

INSTALLATION COMPLETION DIAGRAM

Driver side

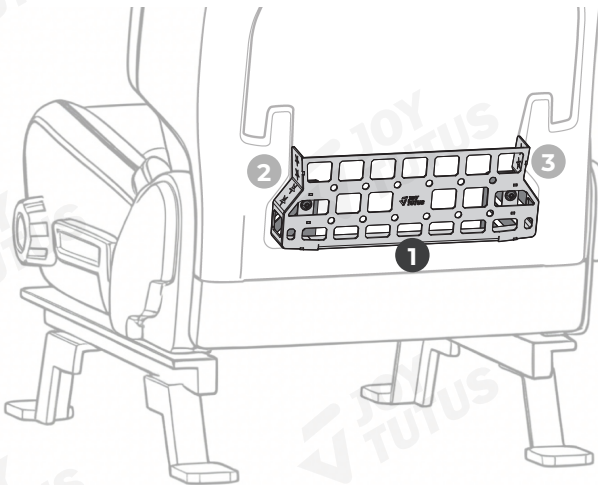

Passenger side

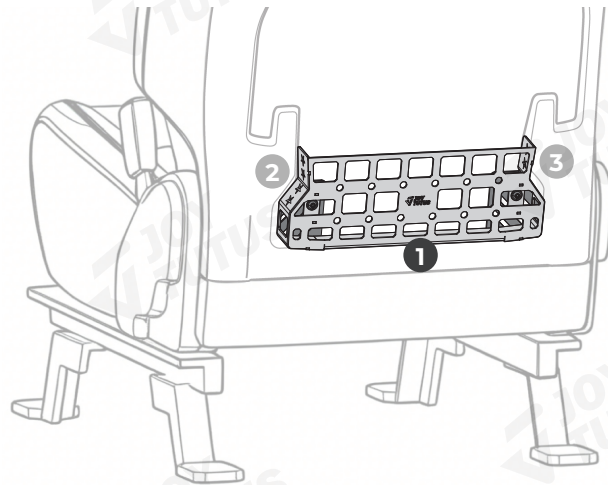


INSTALLATION METHOD

PREREQUISITE



The installation steps
take the driver's seat
as an example;
the installation for the
other seat is the same.

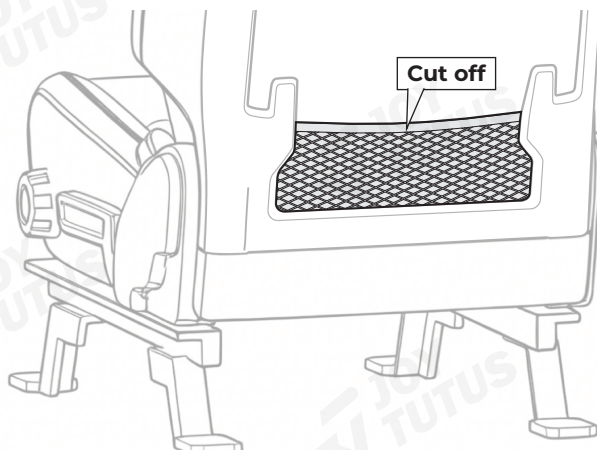


Driver side


Cut off the
original rear
seat net pocket.

STEP 1

Required accessories:



2
Sheet metal
part - L x1





3
Sheet metal
part - R x1




TIP: Insert the upper end first, then the lower end.

Driver side

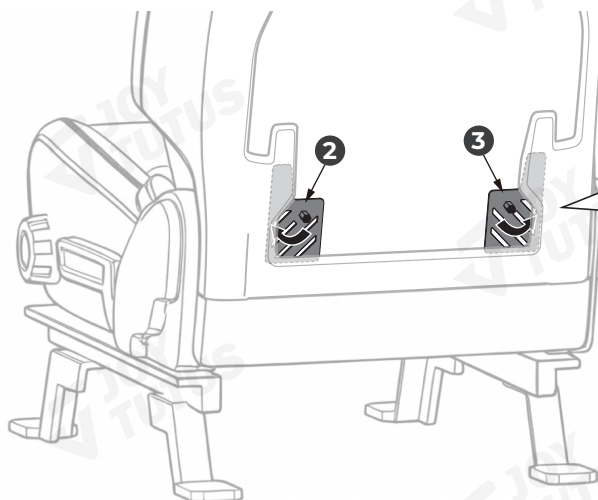

STEP 2

Required accessories:

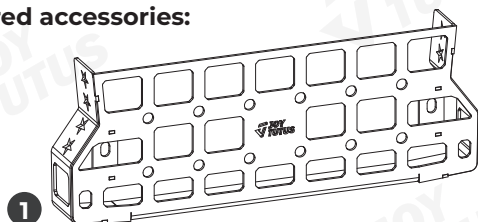

1
Main sheet
metal part x1





4
M6x25
screw x2



5
S=4 hex
wrench x1

Driver side

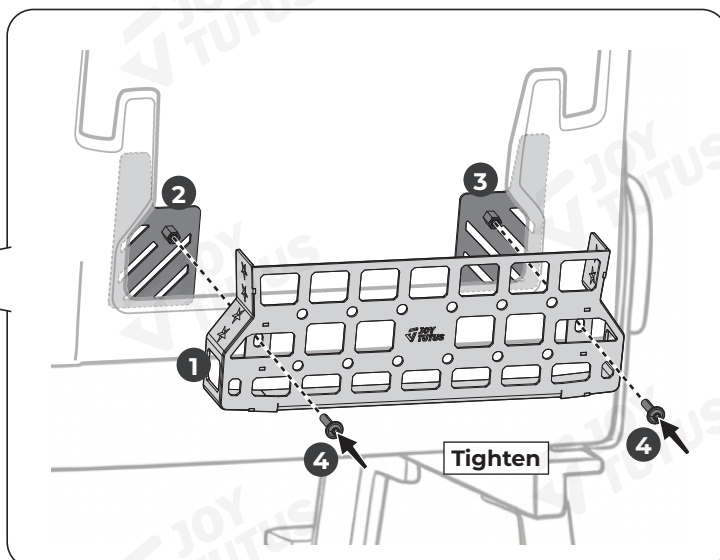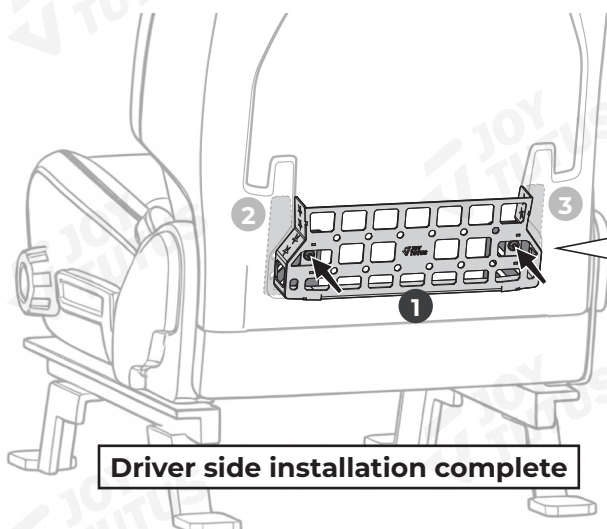

STEP 3

Repeat the steps to install the storage compartment on the passenger side.