


NOTES BEFORE USING

1. If this product is missing parts or defective, please contact us for free part replacements via service@joytutus.com (Please attach Amazon order ID and key code if the key is missing).
2. The weight of the cargo must not exceed the maximum weight limit of 165 lbs(75kg).
3. Check the mounting bolts before use every time and drive under 120km/h (75mph) for security.


IMPORTANT

Before installation, please make sure that all accessories are ready. (As shown in the picture below)

PRODUCT INFORMATION

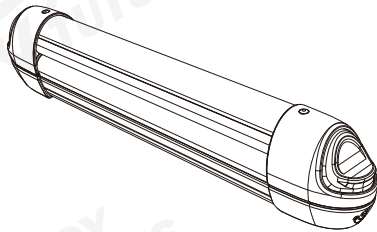

1 Ski Main Rack *2



2 Support & Bolt & Washer *4




3 Wrench *1



4 Key *2

INSTALLATION COMPLETION DIAGRAM

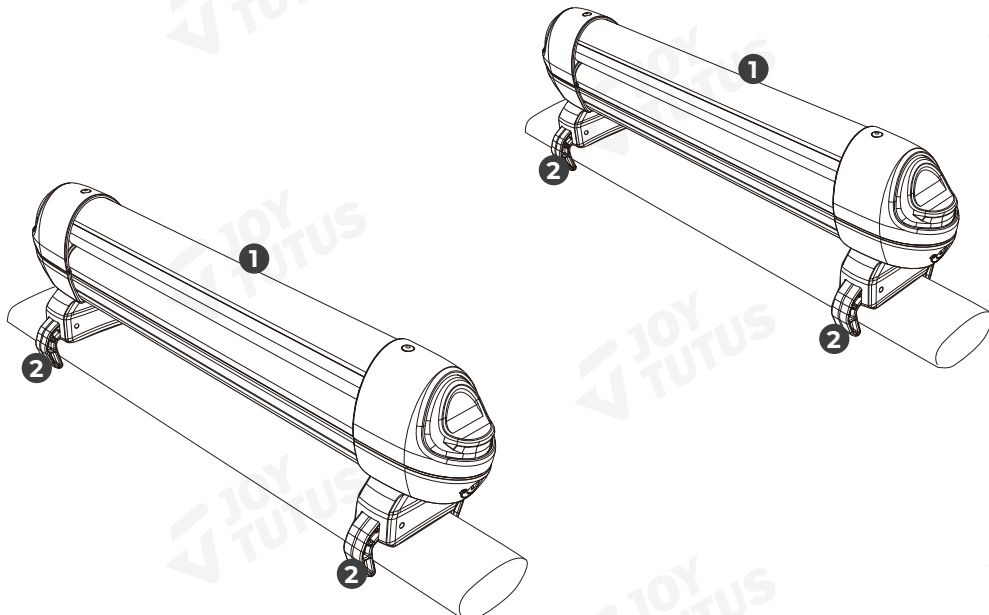

Customer Support



Contact us by email: service@joytutus.com

JOYTUTUS help center:
<http://support.joytutus.com>




TIP BEFORE ASSEMBLY


Before assembly, measure whether the width of the base is suitable for your crossbar. If the base is too wide to install, you can use a second set of base mounting holes.

(Note: Regardless of which set of mounting holes you use, please plug the other holes with rubber plugs.)

For longer cross bar

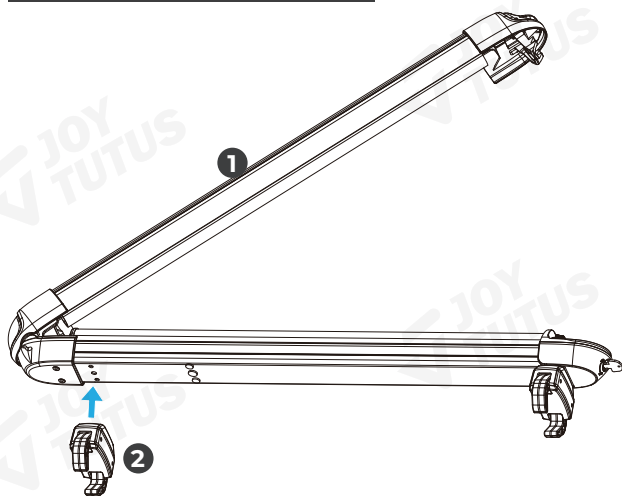


For longer cross bar

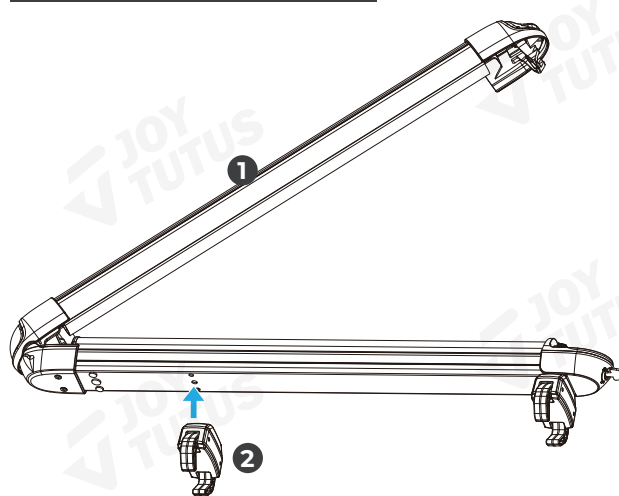

ASSEMBLY

STEP 1: Unlock the rack with the key. Hold the cover when pressing down the button to open the rack.



Required accessories:

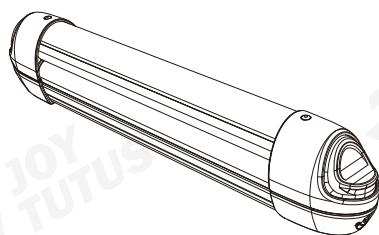

1 Ski Main Rack *2




4 Key *2

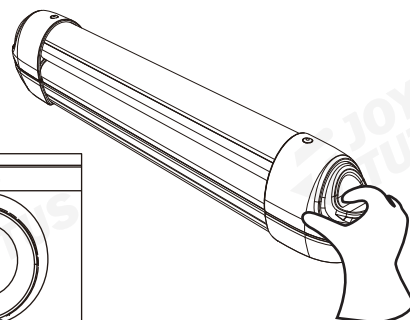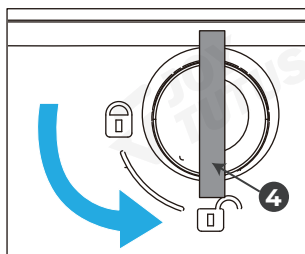

STEP 2: Assemble the mounting support. Remove the bolt and washer first and then use them to connect the mounting support A with the ski main rack. (Do not tighten it at this step)

Required accessories:




2 Support & Bolt & Washer *4



3 Wrench *1

Premise:




Disassemble

A Bolt


B Washer

C Support

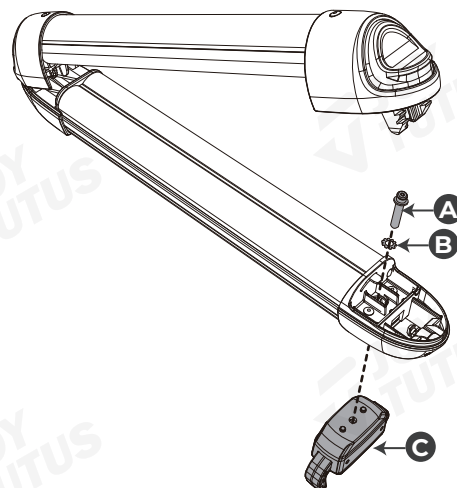


STEP 3:

Push the red button to the left gently. Pull out the rubber rack and assemble the mounting support C as step 2.

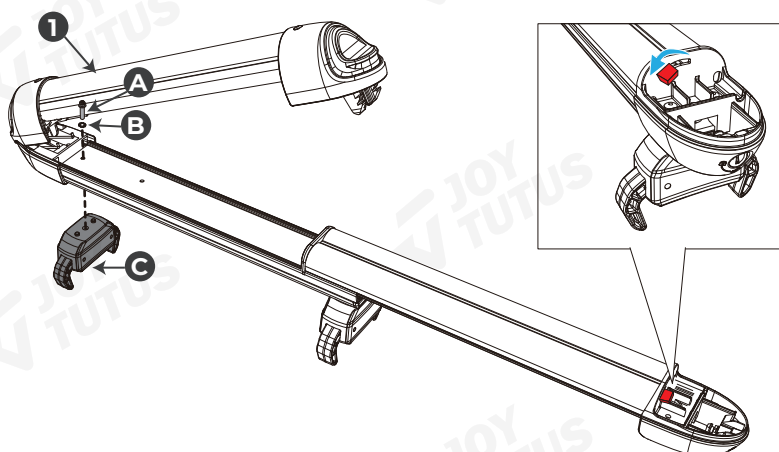**STEP 4:**

Push back the rubber rack and the red button into the original position.

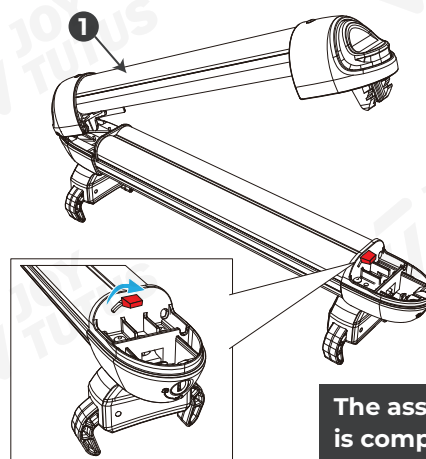


The assembly is completed.


✓ INSTALLATION

STEP 1:


Place it on the cross bar. Firstly tighten the bolt of the mounting support [C] to grab the cross bar firmly.

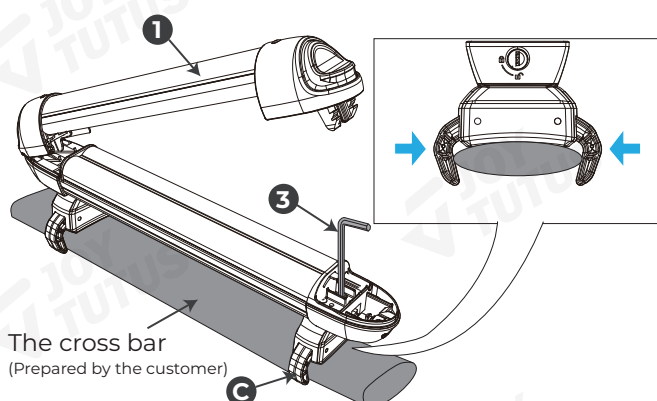**STEP 2:**


Push the red button to the left gently. Pull out the rubber rack and tighten the bolt of the mounting support [C] to grab the cross bar firmly. Push back the rubber rack and the red button into the original position.

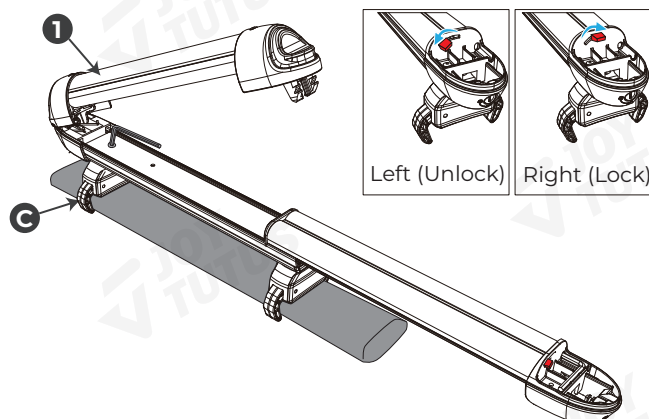**STEP 3:**

Rock the ski rack to see if it's secured to the cross bar firmly.

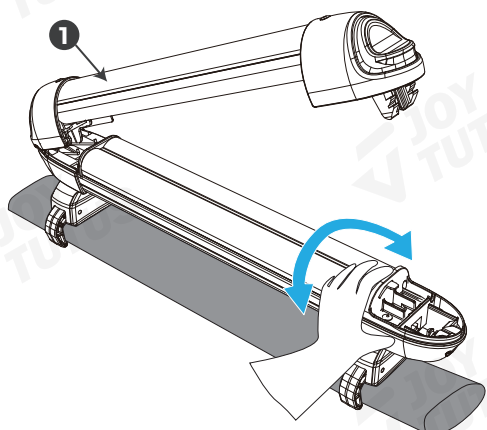
**STEP 4:**

Special design for storing the wrench in the pre-set hole.


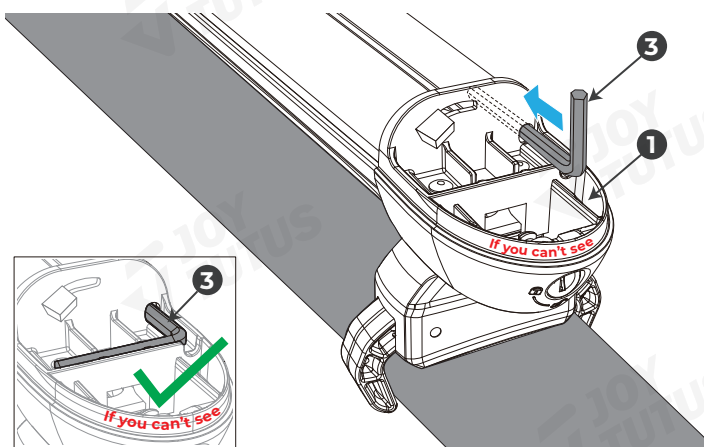


STEP 5:

Lock the rack. The installation is completed.

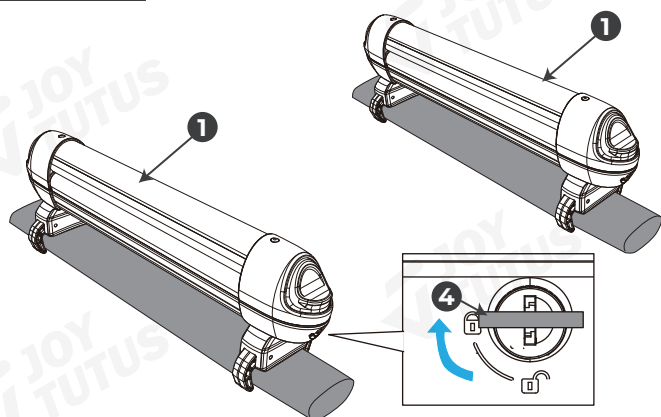


ATTENTION: The top of the rack needs to snap into the bottom of the rack without any gap.

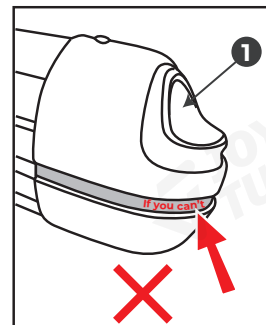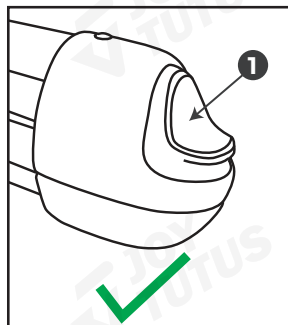

LOADING


STEP 1:

Unlock the rack and pull out the rubber rack. Put the ski board on the rack.

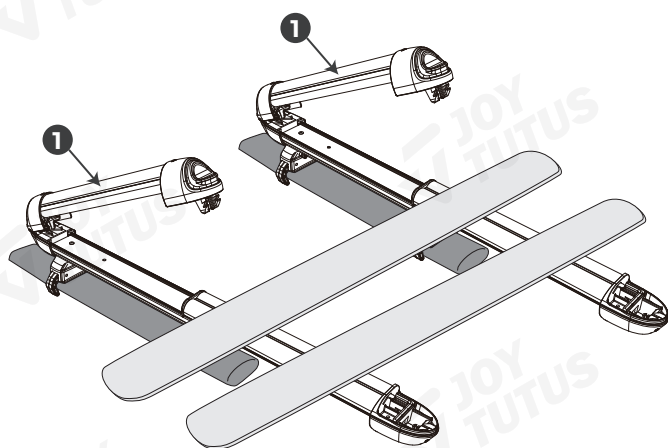


STEP 2:

Cover the top of the rack and lock it. The loading is completed.

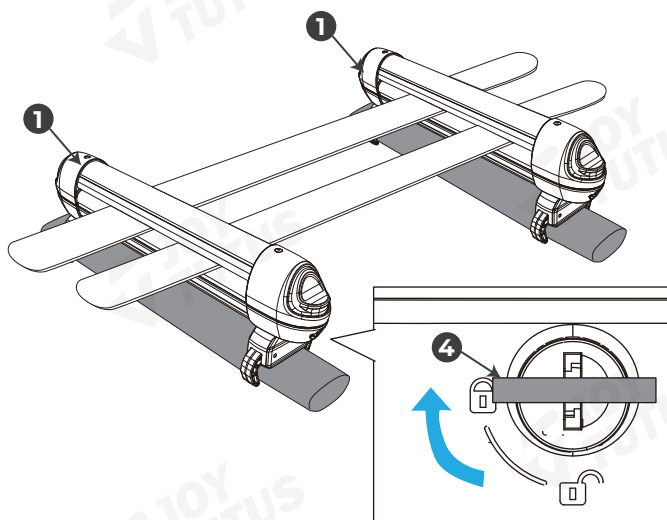

(Note: Please keep the key to avoid losing it.)

SAFE TIPS

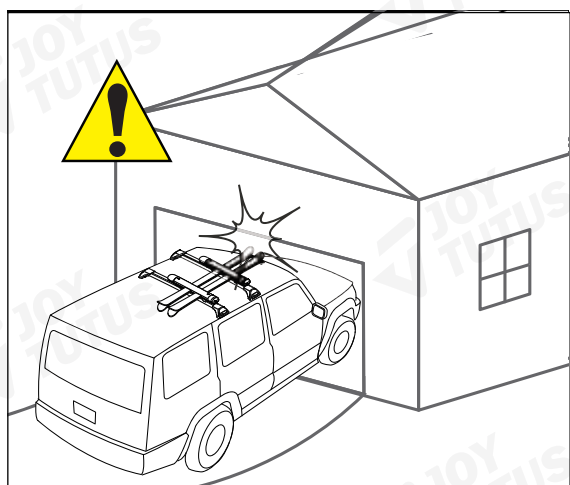

Pay attention to the height limit!

